



# **City of Monterey Park Transportation Study Guidelines for Vehicle Miles Traveled and Level of Service Assessment**

**November 2024**

# Table of Contents

|                                                                            |           |
|----------------------------------------------------------------------------|-----------|
| <b>Introduction</b>                                                        | <b>3</b>  |
| Background Information.....                                                | 3         |
| Transportation Impact Analysis Guidelines .....                            | 4         |
| Application of Guidelines .....                                            | 5         |
| Guidelines Organization.....                                               | 6         |
| <b>Non-CEQA Transportation Assessment</b>                                  | <b>7</b>  |
| Level of Service Analysis Procedure .....                                  | 7         |
| On-Site Parking Analysis.....                                              | 11        |
| Truck Service Assessment.....                                              | 11        |
| Construction Period Assessment.....                                        | 12        |
| Access and Circulation Analysis .....                                      | 12        |
| <b>CEQA Transportation Assessment - VMT Analysis</b>                       | <b>13</b> |
| VMT Analysis Methodology .....                                             | 13        |
| CEQA VMT Impact Thresholds .....                                           | 18        |
| VMT Mitigation Measures .....                                              | 19        |
| <b>CEQA Assessment - Active Transportation and Public Transit Analysis</b> | <b>21</b> |
| <b>Transportation Impact Study Format</b>                                  | <b>22</b> |
| <b>Attachments</b>                                                         | <b>24</b> |
| Attachment A: VMT Analysis Flowchart                                       |           |
| Attachment B: SGVCOG VMT Assessment Tool User Guide                        |           |
| Attachment C: Detailed VMT Forecasting Information                         |           |
| Attachment D: VMT Reduction Strategies                                     |           |

# Introduction

---

These guidelines describe the transportation analysis requirements for land development, roadway projects, and specific plans in the City of Monterey Park. Guidelines are provided for evaluating a project's environmental transportation impacts and effects on the local transportation system.

The purpose of these guidelines is to provide guidance on how to prepare transportation studies in the City in conformance with all applicable City and State regulations.

## Background Information

---

SB 743, signed by the Governor in 2013, has changed the way transportation impacts are identified. Specifically, the legislation directed the Office of Planning and Research (OPR) to look at different metrics for identifying transportation impacts under the California Environmental Quality Act (CEQA). The Final OPR guidelines were released in December 2018 and identified Vehicle Miles Traveled (VMT) as the preferred metric moving forward. The Natural Resources Agency completed the rule making process to modify the CEQA guidelines in December of 2018. The CEQA Guidelines identify that, by July of 2020 all lead agencies must use VMT as the new transportation metric for identifying transportation impacts for land use and transportation projects under CEQA.

In anticipation of the change to VMT, the San Gabriel Valley Council of Governments (SGVCOG) undertook the SGVCOG SB 743 Implementation Study to assist with answering important implementation questions about the methodology, thresholds, and mitigation approaches for VMT impact analysis in its member agencies. The study includes the following main components.

- Analysis Methodologies Memorandum – Identification of potential thresholds that can be considered when establishing thresholds of significance for VMT assessment and recommendations of analysis methodologies for VMT impact screening and analysis
- Mitigation Memorandum – Types of mitigation that can be considered for VMT mitigation
- VMT Assessment Tool – A web-based tool that can be used for VMT screening and mitigation recommendation

The City of Monterey Park utilized the information produced through the Implementation Study to adopt a methodology and significance thresholds for use in CEQA compliance. As noted in CEQA Guidelines Section 15064.7(b) below, lead agencies are encouraged to formally adopt their significance thresholds and this is a key part of the SB 743 implementation process.

*(b) Each public agency is encouraged to develop and publish thresholds of significance that the agency uses in the determination of the significance of environmental effects. Thresholds of significance to be adopted for general use as part of the lead agency's environmental review process must be adopted by ordinance, resolution, rule, or regulation, and developed through a public review process and be supported by substantial evidence. Lead agencies may also use thresholds on a case-by-case basis as provided in Section 15064(b)(2).*

The City has produced these Transportation Study (TS) Guidelines to outline the specific steps for complying with the new CEQA expectations for VMT analysis and the applicable general plan consistency requirements related to Level of Service (LOS).

It should be noted that CEQA requirements change as the CEQA Guidelines are periodically updated and/or legal opinions are rendered that change how analysis is completed. As such, the City will continually review their guidelines for applicability and consultants should contact the City to ensure that they are applying the City's most recent guidelines for project impact assessment.

### **CEQA Changes**

Since the last TS Guidelines update completed by the City, SB 743 was signed into law. A key element of this law is the elimination of auto delay, LOS, and other similar measures of vehicular capacity or traffic congestion as a basis for determining significant environmental impacts. This change is intended to assist in balancing the needs of congestion management with statewide goals related to infill development, promotion of public health through active transportation, and reduction of greenhouse gas emissions.

SB 743 includes amendments to current congestion management law that allows cities and counties to effectively opt-out of the LOS standards that would otherwise apply in areas where Congestion Management Plans (CMPs) are still used. Further, SB 743 required OPR to update the CEQA Guidelines and establish criteria for determining the significance of transportation impacts. In December 2018, OPR released their final recommended guidelines based on feedback from the public, public agencies, and various organizations and individuals. OPR recommended VMT as the most appropriate measure of project transportation impacts for land use projects and land use plans. For transportation projects, lead agencies may select their own preferred metric but must support their decision with substantial evidence that complies with CEQA expectations. SB 743 does not prevent a city or county from continuing to analyze delay or LOS outside of CEQA review for other transportation planning or analysis purposes (i.e., general plans, impact fee programs, corridor studies, congestion mitigation, or ongoing network monitoring).

### **Level of Service Policy**

The City has vehicle LOS standards for which local infrastructure will strive to maintain. The LOS standards apply to discretionary approvals of new land use and transportation projects. Therefore, these TS guidelines also include instructions for vehicle LOS analysis consistent with City requirements.

## **Transportation Impact Analysis Guidelines**

---

State and Federal laws require the correlation of Land Use Element building intensities in a General Plan with the Circulation Element capacity. A TS is required by the City so that the impact of land use proposals on the existing and future circulation system can be adequately assessed and to ensure that the CEQA laws and guidelines are met.

The following TS Guidelines identify CEQA based requirements and non-CEQA based requirements intended for any person or entity who is proposing development in the City and should be used in coordination with the City's Local CEQA Guidelines and Municipal Code to guide the development review process.

For the past several decades, the preparation of a TS was integrated into the CEQA process, in which the TS was used primarily to analyze a project's impacts using intersection and/or roadway segment LOS. However, with the passage of SB 743, changes to the TS process are necessary. Specifically, a TS may be needed as a stand-alone document which is a requirement of project approval and will include information for the decision makers that is not required as part of the CEQA process.

The purpose of these TS guidelines is to provide general instructions for analyzing the potential transportation impacts of proposed development projects. These guidelines present the recommended format and methodology that should generally be utilized in the preparation of a TS.

## Application of Guidelines

---

An applicant seeking project approval will submit the proposed project to the City with a planning and land use application. After a preliminary review of the project by City Staff, the applicant will be notified by the project planner as to whether or not a TS is required. The TS should consider changes in both Level of Service (LOS) and VMT.

A TS which includes LOS analysis shall be required for a proposed project when either the AM or PM peak hour trip generation from the proposed development is expected to exceed 50 vehicle trips. *Traffic study may be required for smaller projects based on land use and location per City's discretion.*

Furthermore, a TS must include a VMT assessment for a proposed project that does **NOT** satisfy the one or more of the following screening criteria:

- Transit Priority Areas Screening
- Low VMT-generating Areas Screening
- Project Type Screening

See Section, "CEQA Assessment - VMT Analysis" for details on these screening criteria.

Projects may be screened from VMT analysis and require level-of-service analysis, or vice-versa. In cases where insufficient information is available to make a preliminary assessment of a proposal's effect on traffic, the City Traffic Engineer shall determine, at his or her discretion, whether a TS will be required.

## Guidelines Organization

---

The remainder of this document is organized to provide guidance on assessment for General Plan Consistency (e.g. Non-CEQA LOS analysis) and CEQA compliance (e.g. VMT analysis), as well as the format for the transportation study.

| Transportation Study                                                 |                                                                                                                      |
|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| <b><u>General Plan Transportation Assessment</u></b><br>LOS Analysis | <b><u>CEQA Transportation Assessment</u></b><br>VMT Analysis<br>Active Transportation and<br>Public Transit Analysis |

# Non-CEQA Transportation Assessment

## Level of Service Analysis Procedure

---

A traffic study reviewing level of service should be prepared under the direction and/or by a registered traffic engineer, registered civil engineer, or qualified transportation planner. To establish a mutually agreeable scope of work for the traffic analysis, the analyst and project applicant shall meet with Planning Department staff and Public Works staff to identify study area, assumptions, and methodologies of the traffic analysis. All assumptions and methodologies of the LOS analysis are subject to review and approval of the City Traffic Engineer.

### When is a Traffic Study Required?

The determination of whether a traffic study will be required is based on the following five basic factors:

1. A traffic study is required for new developments or for the expansion of existing developments which are forecast to generate a minimum of 50 vehicles per hour (total two-way) during the greater of the A.M. or P.M. peak hours. In general, this lower limit includes:
  - a. Single family residential developments of 20 or more dwellings
  - b. Multifamily residential developments of 30 or more dwellings
  - c. Commercial developments of 5,000 square feet or more building area<sup>1</sup>
  - d. Office developments and industrial developments of 5,000 square feet or more
  - e. All mixed-use developments
  - f. All car washes of any type
  - g. Gas stations/convenience stores
2. A traffic study will be required for all developments, regardless of size, located within 300 feet of the intersection of two arterial streets as defined in the General Plan or for any developments fronting on two different streets, regardless of classification.
3. The presence of an existing or future traffic safety problem will require a traffic study.
4. The location of the developments in an environmentally or otherwise sensitive area, or in an area that generates controversy will require a traffic study.
5. The presence of a near-by sub-standard intersection or street will require a traffic study. The sub-standard condition is normally considered to be level of service "D" or worse.

Note that other developments at or below these thresholds may be required by the City Traffic Engineer or his designee to submit a letter analysis.

---

<sup>1</sup> All commercial developments, regardless of size, which include any type of restaurant, will require a traffic study.

## **Traffic Counts**

The traffic analysis should not use any traffic counts that are more than two years old without approval of the City Traffic Engineer. If traffic counts taken within the last two years are not available, then new traffic counts shall be collected by a qualified data collection firm. Turning movement data at the study intersections should be collected in 15-minute intervals during the hours of 7:00 AM to 9:00 AM, and 4:00 PM to 6:00 PM, unless the City Traffic Engineer specifies other hours (e.g., for a signal warrant determination or weekend analysis). Unless otherwise required, all traffic counts should generally be conducted when local schools or colleges are in session, on days of good weather, on Tuesdays through Thursdays during non-Summer months, and should avoid being taken on weeks with a holiday.

## **Trip Generation**

The City will accept the trip generation rate of the latest edition of the Trip Generation Manual published by the Institute of Transportation Engineers (ITE). In addition, analysis for a proposed project with trip generation rates not provided in the ITE Trip Generation Manual, may use rates from other agencies or locally approved studies for specific land uses. Documentation supporting the use of these trip generation rates will be required.

The traffic analysis should include justification for trip generation credits such as existing uses, transit, and internal capture. The pass-by traffic credit should be calculated based upon the Institute of Transportation Engineer data or city approved special studies.

## **Trip Distribution and Assignment**

Description of trip distribution and assignment for vehicle trips to and from the site along specific roadways that will be utilized by project generated traffic is required. The basic methodology and assumptions used to develop trip distribution and assignments must be clearly stated and approved by the City Traffic Engineer. The basis for trip distribution should be linked to the demographic or market data in the area and should consider the project's location relative to the regional roadway system.

The trip assignment for the project should be based on existing and projected travel patterns and the future roadway network and its travel time characteristics. The trip assignment should incorporate the trip generation of the project minus the appropriate credits.

## **Traffic Forecasts**

The traffic analysis should include the total traffic which is expected to occur at buildout of the proposed project. This means that the analyst preparing the traffic study should include all the cumulative effects of the proposed project. The latest version of the Southern California Association of Governments (SCAG) Travel Demand Model or appropriate sub-area travel demand model should be used to generate future year forecasts. Projects which have been approved or planned,

but not built in the vicinity of the proposed project should be verified as included in the latest version of the SCAG model or appropriate sub-area model approved by the City Traffic Engineer.

## **Analysis Methodologies**

The City will use the latest version of the Highway Capacity Manual (HCM) methodology to evaluate the AM and PM peak hour LOS at signalized intersections and unsignalized intersections. The peak hour will be identified as the highest one-hour period in both AM and PM counted periods, as determined by four consecutive 15-minute count intervals. The following parameters should be used in determining the LOS at the intersections within the City.

### ***HCM Methodology***

- Saturation Flow Rate consistent with field measurements or 1,900 passenger cars/hour/lane
- Heavy Vehicle Factor based on count data or provided by the City Traffic Engineer; analyst may use a Passenger Car Equivalent (PCE) conversion to reflect heavy vehicles in the volume or incorporate the heavy vehicle factor in the capacity calculation consistent with HCM requirements
- Grade based on existing or proposed grade of the facility
- Minimum green time should be based on existing signal timings (timing sheets provided by the City Traffic Engineer or collected in the field)
- Cycle lengths should be based on existing signal timings or measured in the field
- Lost time should be based on existing signal timings or consistent with the recommendations from the HCM
- A peak hour factor (PHF) based on observed conditions will be used for the under existing conditions; future peak hour factor should be 0.95
- Intersections must be evaluated with HCM-consistent software; for locations where closely spaced intersections occur or queues build over space and time (extending to upstream or downstream intersections), microsimulation should be utilized to accurately evaluate the intersections as a system. This may require inclusion of freeway facilities.

Pedestrian activity should be considered on a case by case basis using reductions in saturation flow rates for affected lanes as determined by sound engineering judgement. The HCM is the best source of guidance for assessment of pedestrian influences on flow rates.

## **Analysis Scenarios**

The following identifies the analysis scenarios that should be evaluated for LOS analysis (at the discretion of the City Traffic Engineer).

- **Existing Conditions:**

Existing traffic conditions: data must have been collected within the previous 2-year period.

- **Opening Year:**

Existing traffic conditions plus ambient growth and traffic from all the development within the study area for which an application has been submitted ("pending projects"), or that have been approved but not yet constructed. There may be multiple opening years if the project is proposed in phases.

- **Opening Year plus Project:**

Traffic conditions of existing plus ambient growth and approved and pending developments, plus traffic generated by the proposed project.

- **Horizon Year:**

Build-out of City General Plan combined with build-out of circulation system. SCAG Build-out projections should be used for this purpose. A General Plan build out analysis is generally required for any project that contributes traffic to an intersection projected to have unacceptable LOS, any project that requires a General Plan Amendment or otherwise proposes development that exceeds the land use intensity assumed for the General Plan, and/or at the discretion of the City Traffic Engineer.

- **Horizon Year plus Project:**

Cumulative traffic conditions of General Plan build-out plus proposed project.

Projects that are to be constructed in more than one phase will require interim year future analysis to address each phase of the development and its associated traffic effects. The year(s) to be analyzed will coincide with the scheduled phasing and will be approved by the City Engineer or designee.

A table shall be included to show the forecast LOS for each intersection within the defined study area. This summary table shall present LOS for all scenarios evaluated-including improvements.

## **Transportation Effects**

The acceptable LOS for intersections in the City is D or better as established in the City's General Plan. Any intersection operating at a LOS of E or F is considered deficient. Signalized intersections will require improvements if one of the following conditions is met:

- The addition of project traffic to an intersection results in the degradation of intersection operations from acceptable operations (LOS D or better to unacceptable operations (LOS E or F).
- The project-related increase in delay is the following based on the LOS of the intersection prior to the addition of project traffic:

Existing LOS

Project Related Increase in Delay

|                 |           |
|-----------------|-----------|
| LOS C or Better | 6 seconds |
| LOS D           | 4 seconds |
| LOS E or F      | 2 seconds |

Unsignalized intersections will require improvements if both of the following conditions are met:

- The minor stop-controlled approach operates at LOS F and the addition of project trips increases the total control delay to more than 4.0 seconds per vehicle for a single lane approach or 5.0 seconds per vehicle for a multilane approach.
- The intersection meets peak hour signal warrants either caused by project volumes, or project volumes are added at an intersection that meets peak hour signal warrants in the baseline scenario(s). Peak hour signal warrants should be determined based on the latest California Manual on Uniform Traffic Control Devices (CA MUTCD).

The fair share cost for the proposed improvements in the cumulative condition should also be calculated.

## On-Site Parking Analysis

---

This analysis will address the on-site parking supply versus parking required per City code. If the proposed development is of mixed-use type, a table shall be included presenting each land use, its size and the code parking requirement. This table should clearly indicate how the code parking was calculated and include the proposed on-site parking supply together with the resultant surplus or deficit from code requirements.

Should the on-site parking supply be less than required by the City code, a detailed explanation justifying a reduction to the code requirement must be included. Note that this does not eliminate the need for any zoning code variance. Shared parking evaluations will be considered when appropriate.

## Truck Service Assessment

---

A discussion of on/off-site delivery truck circulation shall be included in this section complete with descriptions of the proposed access points, turn prohibitions, number of lanes proposed, deceleration or acceleration lanes provided, turn pocket requirements, vehicle storage length, most probable routes to the site requirements, and any other applicable circulation issues.

This section will also address the on-site delivery docks versus the requirement based on City code. This discussion should clearly indicate how the code requirement was calculated.

Should the number of docks be less than required by the City code, a detailed explanation justifying a reduction to the code requirement must be included. Note that this does not eliminate the need for any zoning code variance.

## **Construction Period Assessment**

---

This section shall include a discussion of any unusual circumstances anticipated during construction. Proposed roadway lane closures, construction signage, safety features, and detours shall be included. Note that the City of Monterey Park, in general, requires that all lanes on arterial roads shall be open to traffic during the periods from 6 to 9 A.M. and from 4 to 7 P.M. At no time will any street capacity be reduced or closed without written permission of the City Traffic Engineer or his designee.

## **Access and Circulation Analysis**

---

The project's effect on access points and on-site circulation shall be analyzed. The analysis shall, as appropriate, include the following:

- Number of access points proposed for the project site.
- Spacing between driveways and intersections.
- Potential signalization of driveways.
- On-site stacking distance. (Including uses with a drive thru.)
- Shared access.
- Turn conflicts/restrictions.
- Adequate sight distance.
- Driveway improvements.
- Pedestrian connections.
- Any other operational characteristics (as identified by City staff).

If the proposed project is a residential or commercial use with privacy gates, the applicant shall provide a stacking analysis for review and approval. The adequacy of the interface with the arterial network will need to be demonstrated and necessary improvements to adjacent intersections may be required.

# CEQA Transportation Assessment - VMT Analysis

## VMT Analysis Methodology

---

For purposes of SB 743 compliance, a VMT analysis should be conducted for land use projects as deemed necessary by the City Traffic Engineer and would apply to projects that have the potential to increase the baseline VMT per service population (e.g. population plus employment) for the City. Normalizing VMT per service population (e.g. creating a rate by dividing VMT by service population) provides a transportation efficiency metric that the analysis is based on. All assumptions and methodologies of the VMT analysis are subject to review and approval by the City Traffic Engineer.

A flowchart of the VMT analysis process is attached to these guidelines. See Attachment A, "VMT Analysis Flowchart". A web-based tool has been prepared as part of this implementation study to assist with VMT assessment screening and mitigation recommendations. A user guide for use of this tool is attached to these guidelines. See Attachment B, "SGVCOG VMT Assessment Tool Users Guide."

## Project Screening

There are three types of screening that may be applied to effectively screen projects from project-level assessment. A project may be screened out of VMT analysis if it meets one or more of the following screening steps. These screening steps are summarized below:

### Step 1: Transit Priority Area (TPA) Screening

Projects located within a TPA<sup>2</sup> may be presumed to have a less than significant impact absent substantial evidence to the contrary. This presumption may **NOT** be appropriate if the project:

1. Has a Floor Area Ratio (FAR) of less than 0.75;
2. Includes more parking for use by residents, customers, or employees of the project than required by the City;

---

<sup>2</sup> A TPA is defined as a half mile area around an existing major transit stop or an existing stop along a high-quality transit corridor per the definitions below. Public Resources Code § 21099(a)(7)

Pub. Resources Code, § 21064.3 - 'Major transit stop' means a site containing an existing rail transit station, a ferry terminal served by either a bus or rail transit service, or the intersection of two or more major bus routes with a frequency of service interval of 15 minutes or less during the morning and afternoon peak commute periods.

Pub. Resources Code, § 21155 - For purposes of this section, a 'high-quality transit corridor' means a corridor with fixed route bus service with service intervals no longer than 15 minutes during peak commute hours.

3. Is inconsistent with the applicable Sustainable Communities Strategy (as determined by the lead agency, with input from the Southern California Association of Governments [SCAG]); or
4. Replaces affordable residential units with a smaller number of moderate- or high-income residential units.

To identify if the project is in a TPA, the analyst may review TPA map included in the SGVCOG VMT assessment tool. Additionally, the analyst should confirm with all local transit providers that no recent changes in transit service have occurred in the project area (e.g. addition or removal of transit lines, addition or removal of transit stops, or changes to service frequency).

### Step 2: Low VMT Area Screening

Residential and office projects located within a low VMT-generating area may be presumed to have a less than significant impact absent substantial evidence to the contrary. In addition, other employment-related and mixed-use land use projects may qualify for the use of screening if the project can reasonably be expected to generate VMT per resident, per worker, or per service population that is similar to the existing land uses in the low VMT area.

For this screening, the SCAG travel forecasting model was used to measure VMT performance for individual traffic analysis zones (TAZs). TAZs are geographic polygons similar to Census block groups used to represent areas of homogenous travel behavior. Total daily VMT per service population was estimated for each TAZ. This presumption may not be appropriate if the project land uses would alter the existing built environment in such a way as to increase the rate or length of vehicle trips. The project applicant should document whether or not any increase to the trip generation rate or length of vehicle trips is expected.

To identify if the project is in a low VMT-generating area, the analyst should use the SGVCOG VMT Evaluation Tool at: <https://apps.fehrandpeers.com/SGVCOGVMT/>. There are two VMT Metrics for each Land Use Type built into the tool as shown in the figure below:

The screenshot shows a web-based interface titled "VMT Metric Specification for Land Use 1". It features a dropdown menu for "Land Use Type" currently set to "Office". Below this is a section for "VMT Metric" with two options: "Home-based Work VMT per Worker" and "Total VMT per Service Population". At the bottom, there is a dropdown for "Jurisdictional Average for Baseline" set to "Subarea Average".

| VMT Metric Specification for Land Use 1 |                                                                    |
|-----------------------------------------|--------------------------------------------------------------------|
| Land Use Type                           | Office ▼                                                           |
| VMT Metric                              | Home-based Work VMT per Worker<br>Total VMT per Service Population |
| Jurisdictional Average for Baseline     | Subarea Average ▼                                                  |

To use the tool for a proposed project, the land use type must be either an existing or future land use within the Tier 1 Traffic Analysis Zone (TAZ) for Total VMT per Service Population, or within the

Tier 2 TAZ for Home-based VMT per capita or Home-based Work VMT per employee. Additionally, if using the Total VMT per Service Population metric, the analyst must verify that the project is consistent with the existing land use (i.e. if the project is proposing single-family housing, there should be existing single-family housing of approximately the same density) within that TAZ and use professional judgment that there is nothing unique about the project that would otherwise misrepresent utilizing the data from the travel demand model.

### **Step 3: Project Type Screening**

Some project types have been identified as having the presumption of a less than significant impact. The following uses can be presumed to have a less than significant impact absent substantial evidence to the contrary as their uses are local serving in nature:

- Local-serving K-12 schools
- Local parks
- Day care centers
- Local-serving retail uses less than 50,000 square feet, including:
  - Gas stations
  - Banks
  - Restaurants
  - Shopping Center
- Local-serving hotels (e.g. non-destination hotels)
- Local-serving assembly uses (places of worship, community organizations)
- Community institutions (public libraries, fire stations, local government)
- Affordable, supportive, or transitional housing
- Assisted living facilities
- Senior housing (as defined by HUD)
- Local serving community colleges that are consistent with the assumptions noted in the RTP/SCS
- Student housing projects on or adjacent to a college campus
- Other local-serving uses as approved by the City Traffic Engineer
- Projects generating less than 110 daily vehicle trips<sup>3,4</sup>

---

<sup>3</sup> Note that a redevelopment project replacing an existing use would estimate the net increase in trips above trips what already exists.

<sup>4</sup> This threshold ties directly to the OPR technical advisory and notes that CEQA provides a categorical exemption for existing facilities, including additions to existing structures of up to 10,000 square feet, so long as the project is in an area where public infrastructure is available to allow for maximum planned development and the project is not in an environmentally sensitive area. (CEQA Guidelines, § 15301, subd. (e)(2).) Typical project types for which trip generation increases relatively linearly with building footprint

- This generally corresponds to the following “typical” development potentials:
  - 11 single family housing units
  - 16 multi-family, condominiums, or townhouse housing units
  - 10,000 sq. ft. of office
  - 15,000 sq. ft. of light industrial<sup>5</sup>
  - 63,000 sq. ft. of warehousing<sup>3</sup>
  - 79,000 sq. ft. of high cube transload and short-term storage warehouse<sup>3</sup>

Local serving retail projects with a total square footage less than 50,000 square feet may be presumed to have a less than significant impact absent substantial evidence to the contrary. Local serving retail generally improves the convenience of shopping close to home and has the effect of reducing vehicle travel. Any project that uses the designation of “local-serving” should be able to demonstrate that its users (employees, customers, visitors) would be existing within the community. The project would not generate new “demand” for the project land uses but would meet the existing demand that would shorten the distance existing residents, employees, customers, or visitors would need to travel.

## **VMT Assessment for Non-Screened Development**

Projects not screened through the steps above should complete VMT analysis and forecasting through the SCAG model or appropriate sub-area model to determine if they have a significant VMT impact. This analysis should include ‘project generated VMT’ for the project TAZ (or TAZs) and ‘project effect on VMT’ estimates under the scenarios below. Project generated VMT shall include the VMT generated by the site compared back to the CEQA threshold of significance. The project effect on VMT is the link based VMT for a geographic region which is more appropriate to review to evaluate how these developments change travel behavior in the region.

- **Baseline conditions:**

This data is available from the SCAG model or appropriate sub-area model approved by the City Traffic Engineer. This data is also available in the SGVCOG VMT Assessment Tool. Baseline conditions typically represent the year of the Notice of Preparation (NOP). Interpolation between the base and future year model will be required to identify the VMT

---

(i.e., general office building, single tenant office building, office park, and business park) generate or attract an additional 110-124 trips per 10,000 square feet. Therefore, absent substantial evidence otherwise, it is reasonable to conclude that the addition of 110 or fewer trips could be considered not to lead to a significant impact.

<sup>5</sup> This number was estimated using rates from ITE’s Trip Generation Manual. Some industrial and warehousing tenants may generate traffic differently than what is documented in ITE. In these cases, documentation of the project generating less than 110 daily trips will be required for review and approval by the City Traffic Engineer.

representative of the baseline year.

- **Baseline plus Project:**

The project land use would be added to the project TAZ or a separate TAZ would be created to contain the project land uses. A full base year model run would be performed and VMT changes would be isolated for the project TAZ and across the full model network. The model output must include reasonableness checks of the production and attraction balancing to ensure the project effect is accurately captured. These reasonableness checks are subject to City Traffic Engineer's review. If this scenario results in a less-than-significant impact, then additional cumulative scenario analysis may not be required (more information about this outcome can be found in the Thresholds Evaluation discussion later in this chapter). The SGVCOG VMT assessment tool provides an estimate of the Baseline plus project conditions. This data could be presented in lieu of results from the full model run. However, it is recommended that a base year plus project run always be performed as a check for reasonableness and consistency with the cumulative year results.

- **Cumulative no Project:**

This data is available from the SCAG model or appropriate sub-area model approved by the City Traffic Engineer.

- **Cumulative plus project:**

The project land use would either be added to the project TAZ or a separate TAZ would be created to contain the project land uses. The addition of project land uses should be accompanied by a reallocation of a similar amount of land use from other TAZs; especially if the proposed project is significant in size such that it would change other future developments. Land use projects are often represented in the assumed growth of the cumulative year population and employment. It may be appropriate to remove land use growth that represents a project from the cumulative year model to represent the cumulative no project scenario. If project land uses are simply added to the cumulative no project scenario, then the analysis should reflect this limitation in the methodology and acknowledge that the analysis may overestimate the project's effect on VMT.

The model output should include total VMT, which includes all vehicle trips and trip purposes, and VMT per service population. Total VMT (by speed bin) is needed as an input for air quality,

greenhouse gas (GHG), and energy impact analysis while total VMT per service population is recommended for transportation impact analysis<sup>6</sup>.

The baseline and cumulative “plus project” scenarios noted above will summarize project generated VMT per service population and comparing it back to the appropriate benchmark noted in the thresholds of significance. The cumulative “plus project” scenario noted above will summarize the project effect on VMT, comparing how the project changes VMT on the network looking at citywide VMT per service population comparing it to the no project condition.

Project-generated VMT shall be extracted from the travel demand forecasting model using the origin-destination trip matrix and shall multiply that matrix by the final assignment skims. The project-effect on VMT shall be estimated using an appropriate boundary as approved by the City Traffic Engineer and extracting the total link-level VMT for both the no project and with project condition.

In some cases, it may be appropriate to extract the Project-generated VMT using the production-attraction trip matrix. This may be appropriate when a project is entirely composed of retail or office uses, and there is a need to isolate the home-based-work (HBW) VMT for the purposes of isolating commute VMT. The City should evaluate the appropriate methodology based on the project land use types and context.

A detailed description of this process is attached to these guidelines. See Attachment C, “Detailed VMT Forecasting Information”.

## **CEQA VMT Impact Thresholds**

---

### **VMT Impacts**

VMT thresholds provided below are to be applied to determine potential project generated VMT impacts and a project’s effect on VMT impacts.

A project would result in a significant project generated VMT impact if either of the following conditions are satisfied:

1. The baseline project generated VMT per employee or per capita exceeds 15% below the applicable baseline VMT (pursuant to the adopted resolution contained in Attachment E), or
2. The cumulative project generated VMT exceeds 15% below the applicable baseline VMT (pursuant to the adopted resolution contained in Attachment E).

---

<sup>6</sup> The City has selected VMT per service population for its impact threshold. However, the City will allow for use of VMT to be isolated by trip purpose with review and approval of the City Traffic Engineer.

The project's effect on VMT would be considered significant if it resulted in the following condition being satisfied:

1. The cumulative link-level boundary Citywide VMT per service population increases under the plus project condition compared to the no project condition.

Please note that the cumulative no project shall reflect the adopted RTP/SCS; as such, if a project is consistent with the SCAG RTP/SCS, then the cumulative impacts (project effect on VMT) shall be considered less than significant subject to consideration of other substantial evidence.

## **VMT Mitigation Measures**

---

To mitigate VMT impacts, the following choices are available to the applicant:

1. Modify the project's-built environment characteristics to reduce VMT generated by the project.
2. Implement transportation Demand Management (TDM) measures to reduce VMT generated by the project.
3. Participate in a VMT fee program and/or VMT mitigation exchange/banking program (if available) to reduce VMT from the project or other land uses to achieve acceptable levels.

As part of the Implementation Study, key TDM measures that are appropriate to the region were identified. Measures appropriate for most of the City are summarized in a table attached to these guidelines. See Attachment D, "VMT Reduction Strategies".

VMT reductions should be evaluated as part of the VMT impact analysis using state-of-the-practice methodologies recognizing that many of the TDM strategies are dependent on building tenant performance over time. As such, actual VMT reduction cannot be reliably predicted and monitoring may be necessary to gauge performance related to mitigation expectations.

When a Project is found to have a significant impact under CEQA, the City requires developers and the business community to assist in reducing peak hour and total vehicular trips by implementing Transportation Demand Management Plans (TDMs). The potential of a proposed project to reduce VMT through the use of a TDM plan should be addressed in the traffic study.

If a TDM plan is proposed as a mitigation measure for a project, and the traffic study attributes a reduction in peak and total traffic to the TDM plan, the following information must be provided:

1. A detailed description of the major components of the TDM plan and how it would be implemented and maintained on a continuing basis.
2. Case studies or empirical data that supports the anticipated reduction of traffic attributed to the TDM plan.
3. Additional Volume/Capacity ratio calculations that illustrate the circulation benefits of the TDM plan.

4. Enforcement Measures – how it will be monitored and enforced.
5. How it complies with the South Coast Air Quality Management District Regulations.

# **CEQA Assessment - Active Transportation and Public Transit Analysis**

---

Potential impacts to public transit, pedestrian facilities and travel, and bicycle facilities and travel can be evaluated using the following criteria:

- A significant impact occurs if the project conflicts with adopted policies, plans, or programs regarding public transit, bicycle, or pedestrian facilities, or otherwise decreases the performance or safety of such facilities.

Therefore, the TS should evaluate whether a project is consistent with adopted policies, plans, or programs regarding active transportation or public transit facilities, or otherwise increases or decreases the performance or safety of such facilities and make a determination as to whether it has the potential to conflict with existing or proposed facilities supporting these travel modes.

# Transportation Impact Study Format

---

Each TS submitted to the City shall contain each of the following elements unless the topic is not applicable. However, items omitted therefrom as “not applicable” shall first be approved by the City.

1. Executive Summary
2. Introduction
3. Existing Street System
4. Project Description and Location
5. LOS Analysis
6. On-Site Parking and Circulation
7. Vehicle Miles Traveled (VMT) Analysis
8. Active Transportation and Public Transit Analysis
9. Appendix

## **1. Executive Summary**

This portion of the report shall present factual and concise information relative to the major issues. Pertinent information in this regard shall include a brief overview of the project, a short discussion of the project’s traffic generation potential, the expected VMT impacts of the project, and a summary of mitigation measures. It should also summarize any deficiencies in roadway LOS and the corresponding proposed improvements.

## **2. Introduction**

The introduction of the report shall include a detailed description of study procedures, a general overview of the proposed project site and study area boundaries, existing and proposed site uses, and existing and proposed roadways and intersections within the defined study area (defined study area to be determined by the City). Exhibits required for this section shall include a regional map showing the project vicinity and a site layout map.

## **3. Project Description and Location**

This section shall expand on information presented in the introduction and shall provide a detailed development scenario and specific project location. Exhibits in this section shall include, at a minimum, a clear illustration of the project in terms of a site plan, its density, adjacent roadways, on-site parking supply, proposed traffic circulation within the project, gross square footage, number of rooms/units, and other descriptors as appropriate.

## **4. Methodology and Thresholds**

Identify the methodology used to calculate LOS and VMT. Include the criteria used for screening projects from project-level VMT analysis, if applicable. Identify the impact threshold for VMT, and the City's LOS standards for roadways and intersections.

## **5. LOS Analysis**

This should include the Traffic Generation Forecast, Traffic Distribution and Assignment, Traffic Analysis, and identify required improvements described about in "Level of Service Analysis Procedure".

## **6. On-site Parking, Access, and Circulation Analysis**

Refer to On-Site Parking Analysis section and Access and Circulation Analysis section.

## **7. Active Transportation and Public Transit Analysis**

Refer to Active Transportation and Public Transit Analysis section.

## **8. Vehicle Miles Traveled (VMT) Analysis**

Present the Project VMT per service population for all analysis scenarios and the Project effect on VMT for all analysis scenarios. Data should be presented in tabular format. If the project meets the City's VMT screening criteria, this should be documented. All VMT impacts should be identified in accordance with the VMT Impact Thresholds described above. Proposed VMT mitigation measures should be identified.

## **9. Appendix**

Detailed appendix material shall be supplied as part of the report. If the main report is too large to include an appendix, such material shall be provided under a separate and identifiable cover. Typical material in this regard includes VMT and TDM calculations, traffic counts, LOS calculation sheets, fully completed signal warrants, accident diagrams at high accident locations, sketches of proposed roadway improvements, and other information necessary for the City's review of the report.

# Attachments

## **Attachment A: VMT Analysis Flowchart**

Steps

Project Questions

Procedural Flowchart

 Decision

 Analytical process or procedural outcome


Step 1

Screening

Type A

TPA Screening

1. Is the project in a Transit Priority Area?
2. Are the following requirements met?
  - Must have a total FAR greater than or equal to 0.75
  - Cannot provide more parking than the City Municipal Code Requirement
  - Must be consistent with SCAG RTP/SCS
  - Cannot replace affordable units with a smaller number of moderate- or high-income residential units

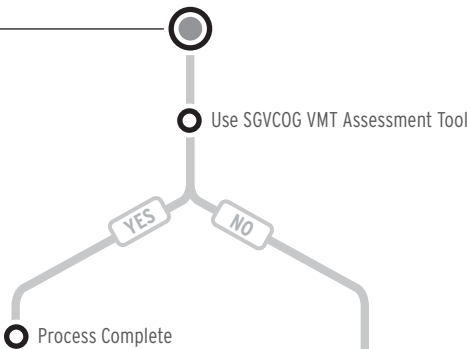


Type B

Low VMT Area Screening

1. Is the project located in a low VMT area?
2. Are the following requirements met?
  - The project is composed of similar land use types and of a similar density to the land uses within the project TAZ
  - The project is assumed to generate VMT per person similar to those existing uses

Note: Review jurisdiction's thresholds of significance for definition of low VMT area.

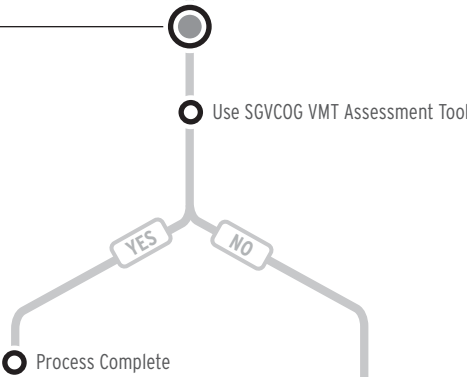


Type C

Project Type Screening

- Is the project a local-serving project as noted in the Project Type Screening project list in the TIA Guidelines?
- These projects include but are not limited to:
  - Local serving K-12 schools
  - Local-serving retail uses less than 50,000 square feet
  - Community and Religious Assembly Uses
  - Public Services
  - Affordable or supportive housing
  - Projects generating less than 110 daily vehicle trips
  - Other projects as approved by the City Traffic Engineer

Note: If the project fulfills Type A, B or C screening, the project is presumed to result in a less-than-significant transportation impact.

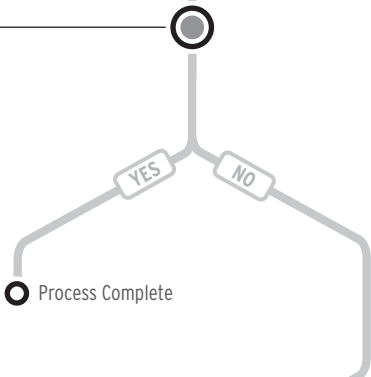

Step 2


VMT

Assessment

- What is the project-level VMT and its effect on VMT assessment?
- Does the project have a less than significant impact?

Details for VMT Assessment are provided in Transportation Study guidelines.

Note: If the project is not screened from assessment in Step 1, the project will require a full VMT assessment to disclose potential significant impacts.

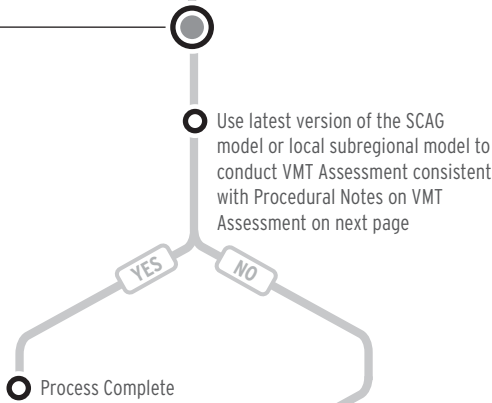

Step 3

Developing


Mitigation

Measures

- What are the options to mitigate VMT impacts?

- Note: VMT reductions associated with proposed TDM mitigation measures can be estimated with:
- CAPCOA reduction equations
  - Use of SCAG model
  - The SGVCOG VMT Assessment Tool TDM module can be utilized to estimate VMT reduction potential associated with TDM measures

\*Please note that a Mitigation Bank or Mitigation Exchange program may not be readily available. Check with your local agency.

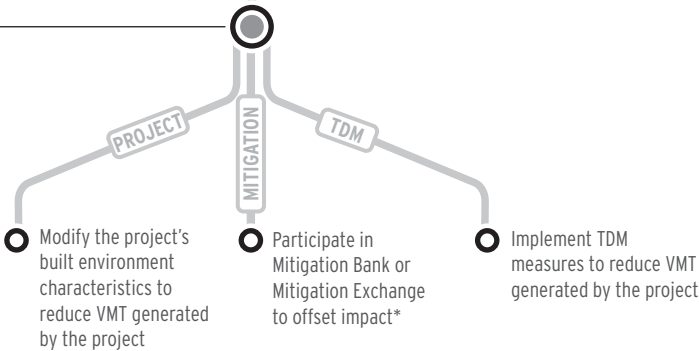

Abbreviations

|                                                                |                                        |
|----------------------------------------------------------------|----------------------------------------|
| CAPCOA = California Air Pollution Control Officers Association | TDM = Transportation Demand Management |
| FAR = Floor Area Ratio                                         | TIA = Traffic Impact Analysis          |
| PA = Production-Attraction                                     | TPA = Transit Priority Area            |
| RTP = Regional Transportation Plan                             | VMT = Vehicle Miles Traveled           |
| SCAG = Southern California Association of Governments          |                                        |
| SCS = Sustainable Communities Strategy                         |                                        |
| SGVCOG = San Gabriel Valley Council of Governments             |                                        |

## **Attachment B: SGVCOG VMT Assessment Tool User Guide**

---

# SGVCOG VMT Tool: Quick Start Guide & Documentation

(August 28, 2024)

Led by the San Gabriel Valley Council of Governments (SGVCOG) at the direction of 27 of the 31 member cities that constitute SGVCOG, this tool is an outcome of the VMT implementation process whereby the participating cities adopted new significance thresholds for analyzing transportation impacts pursuant to Senate Bill 743 (SB 743). The tool covers the following SGVCOG cities:

|              |                      |                |
|--------------|----------------------|----------------|
| Alhambra     | Industry             | Rosemead       |
| Arcadia      | Irwindale            | San Dimas      |
| Azusa        | La Canada Flintridge | San Gabriel    |
| Baldwin Park | La Puente            | San Marino     |
| Claremont    | La Verne             | Sierra Madre   |
| Covina       | Monterey Park        | South El Monte |
| Diamond Bar  | Montebello           | Temple City    |
| Duarte       | Monrovia             | Walnut         |
| El Monte     | Pomona               | West Covina    |

The tool can be accessed at <https://apps.fehrandpeers.com/SGVCOGVMT/>. Each of the cities has unique thresholds of significance, and the methodologies for VMT screening may vary slightly due to the different development patterns and geographic location of each community. Please coordinate with the respective city when using this tool for development purposes.

## WHAT DOES THIS TOOL DO?

The SGVCOG VMT Tool is designed to assist you in screening and estimating project-generated VMT for certain types of land use projects in the San Gabriel Valley and calculating VMT reductions associated with certain VMT-reducing measures. The tool is intended for use on four primary land uses:

- Residential
- Office
- Industrial
- Commercial (e.g. retail, restaurant, and recreational uses)

The tool evaluates projects with one or a combination of these uses.

## LIMITATIONS OF THE VMT EVALUATION TOOL

The VMT Evaluation Tool only covers some of the possible screening criteria that a city may establish for land use project VMT analysis per California Senate Bill 743. The Tool is limited to providing estimates based on data provided in the model, whereby if a proposed project is of a land use type that is not reflected in the Traffic Analysis Zone (TAZ) either now or in the future, the Tool is not capable of

estimating the VMT efficiency rate for that land use type. Other land uses types, large, complex and/or mixed-use projects, or long-range land use plans should be analyzed by performing custom modeling using the SCAG RTP Model or other appropriate tool determined in consultation with the agency. Before making any decisions based on the information provided by the VMT Evaluation Tool, it is recommended that you contact the city in which the proposed development is located.

## RUNNING THE VMT EVALUATION TOOL – 4 BASIC STEPS

The following are the four basic steps involved in running the VMT Evaluation Tool:

### Page 1: Select Project Area

#### Step 1: Jurisdiction


Using the drop-down box, select the city where the project is located. This is required.

#### Step 2: Select Parcel(s)

There are three ways to locate the parcels associated with a proposed project:

1. Type in the Assessor Parcel Number(s) (APN). The APN requires exclusion of the dash between each grouping of numbers (XXXXXXXXXX).
2. Type in the Project Address; or,
3. Zoom into the map

To select the parcel, click on “Add”. If you are selecting by zooming into the map, click the “Add” button first and then select the parcel from the map. You will see the selected APNs display under the “Selected APN” field.

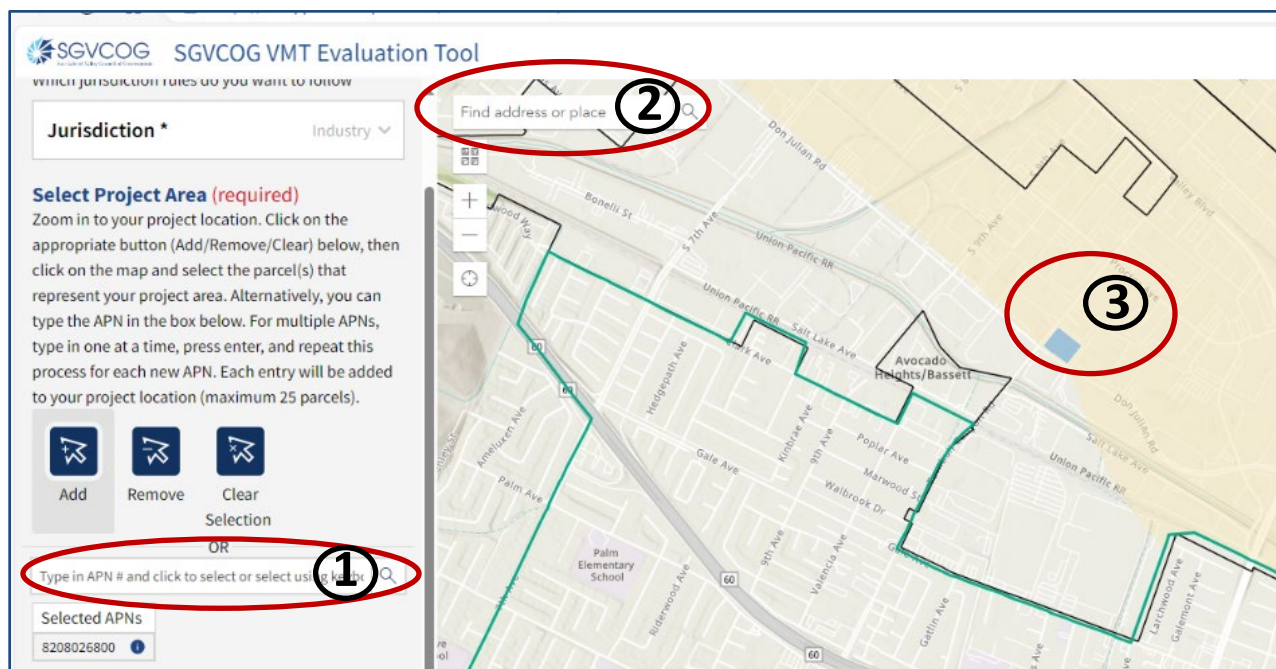

### Page 2: Determine Screening Inputs

- **Project Information**
  - **Project Name:** Must type in a project name (required field) – max 250 characters

- **Project Description:** Required field – max 250 characters
- **APNs:** Auto-populated from Page 1


The screenshot shows the 'SGVCOG VMT Evaluation Tool' interface. At the top, there's a header with the SGVCOG logo and navigation links for 'USER AGREEMENT' and 'REPORT A PROBLEM/FEEDBACK'. Below the header, there's a large text input field for 'Project Description'. Underneath, a section labeled 'APN Number(s)' contains a text box with the value '8242013840'. The next section is 'Select Base Data', which includes a 'Data Version \*' dropdown menu currently set to 'SCAG Regional Travel Demand Model 2024'. Following this is the 'Analysis Methodology' section with a 'Method \*' dropdown set to 'Traffic Analysis Zone (TAZ) Method'. The final section shown is 'Select Baseline Year', which features a 'Baseline Year' dropdown set to '2024' and a horizontal timeline slider ranging from 2019 to 2050, with a blue dot indicating the 'Selected Value: 2024'.

- **Select Base Data:** Auto-populated
- **Analysis Methodology:** Auto-populated
- **Select Baseline Year:** The tool has the capability of providing baseline VMT between 2019 and 2050 pursuant to the 2024 SCAG RTP Model. To select a baseline year, click on the timeline and slide the point to the preferred baseline year.
- **VMT Metric Specification for Land Use 1-3:** The tool is capable of evaluating up to three land use types per project. The tool is also capable of evaluating the difference in VMT Metrics for one land use type. For the latter, select the same land use type for Land Use 1 and Land Use 2 and select different VMT Metrics.
- **Land Use Type:** Select 1)

This screenshot shows the configuration options for 'Land Use 3'. It includes dropdown menus for 'VMT Metric' (set to 'Total VMT per Service Population'), 'Jurisdictional Average for Baseline' (set to 'Subarea Average'), and 'Threshold (% reduction from baseline year)' (set to '-15%'). Below these, a section titled 'VMT Metric Specification for Land Use 3' contains a 'Land Use Type' dropdown set to 'Residential'. A 'VMT Metric' dropdown is also present, with a tooltip showing options: 'Home-based VMT per Capita' and 'Total VMT per Service Population'. The 'Jurisdictional Average for Baseline' and 'Threshold' settings are repeated at the bottom of this section.

Residential, 2) Office, 3) Industrial, or 4) Commercial.

- **VMT Metric:** Select VMT per Capita, VMT per Worker, or Total VMT per Service Population
- **Jurisdictional Average for Baseline:** Pre-set (based on City preferences)
- **Threshold:** Pre-set (based on City preferences)
- **Project Screening Only (go to Page 3 - RESULTS)** versus **Continue to VMT Reduction Factors (go to Page 4):** Option to screen first without VMT reductions. The tool provides a mechanism to return to this page and select reductions. Note that if you select “Project Screening Only” the tool will perform the analysis, this step may take several seconds – you will see a spinning icon reflecting that the tool is working on the analysis.

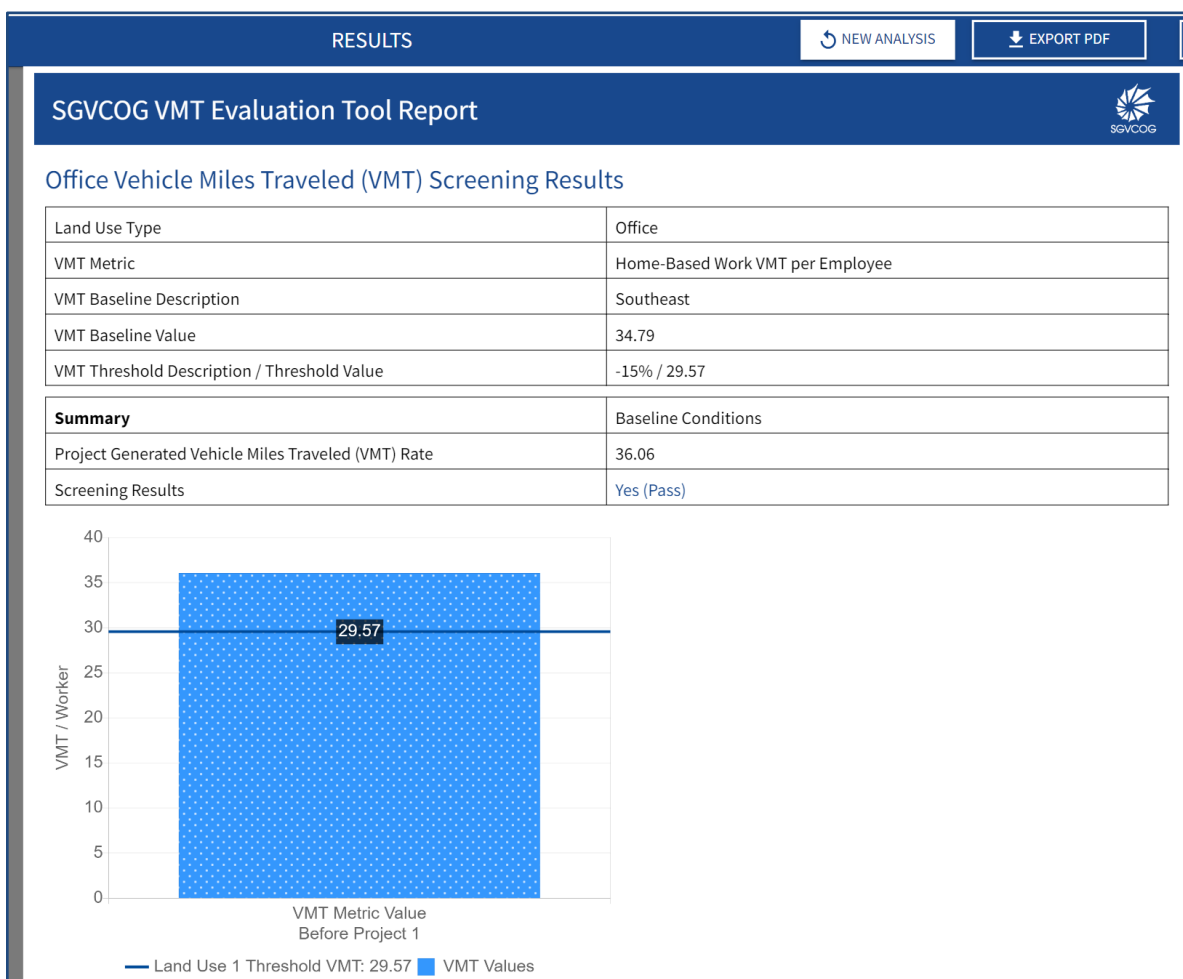


**Page 3 (VMT Screening Results):** From this page with Project Screening Results, there is an option at the top left of the page to “Edit Inputs”. Click this to return to Page 2.

**Page 4 (Land Use Info and VMT Reduction Strategies):** Click on **Continue to VMT Reduction Strategies on Page 2** to test VMT reduction strategies. Details about the VMT Reduction Strategies are provided in Appendix D of the Transportation Assessment Guidelines.

On this page, populate the project details. Note that all Project Land Use Information fields must be populated with a value. Enter “0” for all categories that are not relevant.

- **Project Land Use Information**


- The left-hand entry boxes contain up/down arrows for increasing/decreasing values, but by clicking to the left of the up/down arrows, you may also type in a value, as shown below. Please note that all square-footage values are calculated in the tool in terms of one thousand square feet (KSF) so for a 6,000 square-foot office, the field would be populated with a “6”, as shown below.



The screenshot shows a form titled "Non-Residential" with a sub-field "Office". To the right of the "Office" field is a value of "6" followed by "KSF". The field has up and down arrows on its left side for navigation.

- **VMT Reduction Strategies**

- Select the desired VMT Reduction Strategies by first clicking the box next to the strategy. In some cases, additional inputs will be required, such as the example below for **T-09 Implement Subsidized or Discounted Transit Program - Employment Project (P/S)**.

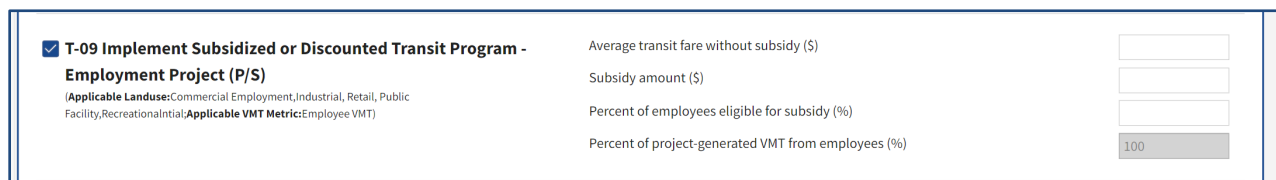

The screenshot shows a form for selecting a VMT Reduction Strategy. The strategy "T-09 Implement Subsidized or Discounted Transit Program - Employment Project (P/S)" is selected with a checkbox. Below the strategy name, there is a note: "(Applicable Landuse: Commercial Employment, Industrial, Retail, Public Facility, Recreational; Applicable VMT Metric: Employee VMT)". To the right of the strategy name, there are four input fields for: "Average transit fare without subsidy (\$)", "Subsidy amount (\$)", "Percent of employees eligible for subsidy (%)", and "Percent of project-generated VMT from employees (%)". The last field has a value of "100" entered.

- **A number of reduction strategies overlap with each other.** For instance, a strategy may consist of a basket of measures which may overlap with some of the measures in another strategy. The SGVCOG VMT Evaluation Tool has been coded to reflect one of these dependencies for T-05 and T-06, but other dependencies should be closely evaluated to ensure that VMT reductions are accurately calculated pursuant to **Appendix A** of this User's Guide.

Once all land use information fields have been completed and at least one strategy selected, the “Continue to VMT Results” button at the bottom of the page will be available. Clicking on the button will take you to “Page 3 - RESULTS” and the results will include the VMT screening results and the VMT results with the VMT reduction strategies applied. The results will also display if the VMT impact is significant or less than significant. You can return to the inputs page by clicking the “Return” button at the left-top of the page.

- Note that when you select “Continue to VMT Results” the tool will perform the analysis, this step may take several seconds – you will see a spinning icon reflecting that the tool is working on the analysis.

## CONTENTS of “Page 3 – RESULTS”

The Results Report provides a summary of the screening results, VMT analysis, and VMT reduction. The following sections are provided in the Results Report:

- **Project Details:** This section provides the date/time that the report was generated, the project name and the project description.
- **Project Location Map:** This section provides the jurisdiction, APN, TAZ number and a project map.
- **Proximity Transit Screening:** This section identifies if the project is in a transit priority area.
- **Analysis Details:** This section provides the SCAG data version, methodology, and baseline year

- VMT Screening Results: This section summarizes the land use type and VMT metric and methodology, and if the project is in a Low VMT area (and is screened). See below for an example. This Tool screens projects based on their location within a TPA and/or a Low VMT Area. The Screening Results provides the following information about these two screening criteria.
- If VMT reduction strategies are selected, the report includes the VMT results before and after applying the VMT reduction strategies and provides a list of all strategies with the selected strategies highlighted.
- **NOTE:** The Tool does not screen based on 110-daily trips. Screening for this factor must be completed outside of the tool using the ITE Trip Generation Manual.

A screenshot of a sample report is provided below.

RESULTS

NEW ANALYSIS

SGVCOG VMT Evaluation Tool Report

SGVCOG

Project Details

Timestamp of Analysis

August 19, 2024, 11:33:12 AM

Project Name

Must insert a name

Project Description

Text required

Project Location Map

jurisdiction:

APN

TAZ

Industry

8208026800

22285100

Analysis Details

Data Version

SCAG Regional Travel Demand Model 2024

Analysis Methodology

TAZ

Target Baseline Year

2024

Project Land Use

Residential:

Single Family DU:

0

Multifamily DU:

0

Total DUs:

0

Non-Residential:

Office KSF:

0

Industrial KSF:

100

Residential Affordability (percent of all units):

Low Income:

0 %

Parking:

Motor Vehicle Parking:

75

Bicycle Parking:

12


Proximity Transit Screening

Inside a transit priority area?

Yes

Page 1 of the SGVCOG VMT Evaluation Tool Report provides project information inputs.

**Page 2** of the SGVCOG VMT Evaluation Tool Report provides details about the VMT generation in the area of the proposed project. The table in the figure below indicates the VMT per Employee Baseline (34.79), and the dark blue line indicated in the bar chart (29.57) indicates the threshold of 15 percent below the Baseline.

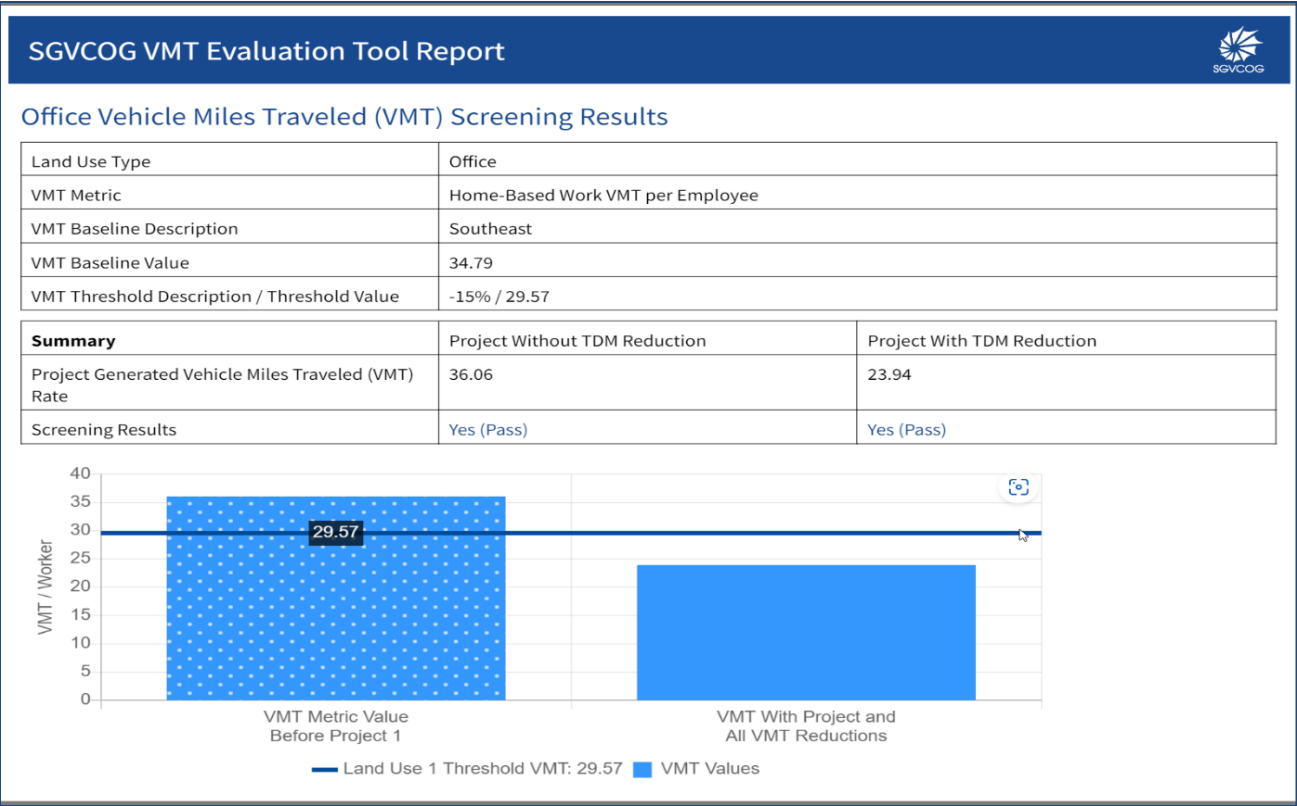

READING THE REPORT & EXPORT FILES

The VMT Evaluation Tool produces two types of outputs: a formatted report, which shows up on the Results screen and can be downloaded as a PDF file, and data tables including all the user-provided inputs and the back-end data which can be downloaded as CSV files (use the buttons at the upper right of the screen).



Key things to look for in the report / PDF:

- **Whether the project falls in proximity to transit** (within ½ mile of a Major Transit Stop, or ½ mile of a stop along a High-Quality Transit Corridor as defined in state law): Look for the ‘Inside TPA?’ question on Page 1 of the report.



- **Whether the project falls in a low-VMT area** (i.e., below the VMT threshold specified by the city/town/county): Look for the ‘Low VMT Screening Analysis’ row on the Screening Results page(s) of the report, starting on page 2. There will be Low-VMT Screening results for each land use you select.

|                                                     | Without Project | With Project and Tier 1-3 VMT Reductions | With Project and All VMT Reductions |
|-----------------------------------------------------|-----------------|------------------------------------------|-------------------------------------|
| Project Generated Vehicle Miles Traveled (VMT) Rate | 14.69           | 14.53                                    | 11.75                               |
| Low VMT Screening Analysis                          | No (Fail)       | No (Fail)                                | Yes (Pass)                          |

### TIPS FOR SUCCESS

- Look for the “tool-tips”  across the tool to help understand fields where inputs are required.
- The tool may take up to a minute to run a report; if it takes much longer, refresh and try again.
- If you are running variations on the same site and project, use the back arrows in the upper-left of the screen (such as  EDIT INPUTS ) to go back, vary some inputs, and run the report again.
- To start a completely new analysis while staying in the tool, use the button in the upper-right of the Results screen. 
- The tool is optimized for Chrome, Firefox, Edge or Safari on a Windows or Mac computer, although you may also access it from a tablet or another browser. If you encounter unexpected issues, try clearing your browser cache and cookies and running again.
- Please fill out the short feedback form by clicking on the link  in the upper-right of the tool. You may report errors, rate the tool, and offer suggestions for future improvements.

### FOR MORE INFORMATION

If you have questions about the VMT Evaluation Tool, you may email [j.hayes@fehrandpeers.com](mailto:j.hayes@fehrandpeers.com).

**For any inquiries about how the tool may be applied in a land use review and approval process, please contact city staff in which the project is located.**

## **Appendix A: VMT Reduction Strategies**

Handbook for Analyzing Greenhouse Gas Emission Reductions,  
Assessing Climate Vulnerabilities, and Advancing Health and Equity

California Air Pollution Control Officers Association (CAPCOA)  
December 2021

|                                                                              |                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| List of All VMT Reduction Strategies                                         | <b>Notes:</b><br>Refer to the <i>CAPCOA Handbook for Analyzing Greenhouse Gas Emission Reductions, Assessing Climate Vulnerabilities, and Advancing Health and Equity</i> (GHG Handbook, December 2021) for additional information on evaluating strategy effectiveness at reducing VMT. |
| T-01 Increase Residential Density                                            | <b>Applicable Land Use:</b> Residential<br>Should be applied to larger developments and/or developments where the density is somewhat similar to the surrounding neighborhood.                                                                                                           |
| T-02 Increase Job Density                                                    | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational<br>Should be applied to larger developments and/or developments where the density is somewhat similar to the surrounding neighborhood.                                              |
| T-03 Provide Transit Oriented Development                                    | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational<br>To qualify as a TOD, the development must be within a 10-minute walk (0.5 mile) of a high frequency transit station.                                                             |
| T-04 Integrate Affordable and Below Market Rate Housing                      | <b>Applicable Land Use:</b> Residential<br>Multifamily residential units must be permanently dedicated as affordable for lower income families. See definition in the GHG Handbook.                                                                                                      |
| T-17 Improve Street Connectivity                                             | <b>Applicable Land Use:</b> Large Community of Citywide Plan                                                                                                                                                                                                                             |
| T-05 Implement Commute Trip Reduction Program – voluntary                    | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational                                                                                                                                                                                     |
| T-06 Implement Commute Trip Reduction Program – mandatory                    | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational                                                                                                                                                                                     |
| T-07 Implement Commute Trip Reduction Marketing – Employment Project         | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational                                                                                                                                                                                     |
| T-08 Provide Ride-Sharing Program – Employment Project                       | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational                                                                                                                                                                                     |
| T-09 Implement Subsidized or Discounted Transit Program – Employment Project | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational                                                                                                                                                                                     |
| T-10 Provide End-of-Trip Bicycle Facilities                                  | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational                                                                                                                                                                                     |
| T-11 Provide Employer-Sponsored Vanpool                                      | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational                                                                                                                                                                                     |
| T-12 Price Workplace Parking                                                 | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational                                                                                                                                                                                     |
| T-13 Implement Employee Parking Cashout                                      | <b>Applicable Land Use:</b> Commercial Employment, Industrial, Retail, Public Facility, Recreational                                                                                                                                                                                     |

|                                                                                      |                                                                                                      |
|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| <b>T-23 Provide Community-Based Travel Planning - Employment Project</b>             | <b>Applicable Land Use: Commercial Employment, Industrial, Retail, Public Facility, Recreational</b> |
| <b>T-07 Implement Commute Trip Reduction Marketing - Residential Project</b>         | <b>Applicable Land Use: Residential</b>                                                              |
| <b>T-09 Implement Subsidized or Discounted Transit Program - Residential Project</b> | <b>Applicable Land Use: Residential</b>                                                              |
| <b>T-23 Provide Community-Based Travel Planning - Residential Project</b>            | <b>Applicable Land Use: Residential</b>                                                              |
| <b>T-15 Limit Residential Parking Supply</b>                                         | <b>Applicable Land Use: Residential</b>                                                              |
| <b>T-16 Unbundle Residential Parking Costs from Property Cost</b>                    | <b>Applicable Land Use: Residential</b>                                                              |
| <b>T-24 Implement Market Price Public Parking - On-Street</b>                        | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-18 Provide Pedestrian Network Improvement</b>                                   | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-19A Construct or Improve Bike Facility</b>                                      | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-19B Construct or Improve Bike Boulevard</b>                                     | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-20 Expand Bikeway Network</b>                                                   | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-21A Implement Conventional Carshare Program</b>                                 | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-21B Implement Electric Carshare Program</b>                                     | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-22A Implement Pedal (Non-electric) Bikeshare Program</b>                        | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-22B Implement (Electric) Bikeshare Program</b>                                  | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-22C Implement Scootershare Program</b>                                          | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-25 Extend Transit Network Coverage or Hours</b>                                 | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |
| <b>T-26 Increase Transit Service Frequency</b>                                       | <b>Applicable Land Use: Large Community of Citywide Plan</b>                                         |

|                                                            |                                                              |
|------------------------------------------------------------|--------------------------------------------------------------|
| <b>T-27 Implement Transit-Supportive Roadway Treatment</b> | <b>Applicable Land Use: Large Community of Citywide Plan</b> |
| <b>T-28 Provide Bus Rapid Transit</b>                      | <b>Applicable Land Use: Large Community of Citywide Plan</b> |
| <b>T-29 Reduce Transit Fare</b>                            | <b>Applicable Land Use: Large Community of Citywide Plan</b> |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Strategies selected <b>MUST</b> be applicable to the land use being evaluated. Each strategy indicates the applicable land use and applicable VMT metric listed under the measure title.</p>                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                             |
| <p>If this strategy is chosen...</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <p>Additional VMT Reduction is <b>NOT</b> possible from...</p>                                                                                                                                                                                                                                                                                                                                              |
| <p><b>T-05 Implement Commute Trip Reduction Program – voluntary</b><br/> Voluntary CTR programs must include the following elements to apply the VMT reductions reported in literature.</p> <ul style="list-style-type: none"> <li>• Employer-provided services, infrastructure, and incentives for alternative modes such as ridesharing (Measure T-8), discounted transit (Measure T-9), bicycling (Measure T-10), vanpool (Measure T-11), and guaranteed ride home.</li> <li>• Information, coordination, and marketing for said services, infrastructure, and incentives (Measure T-7).</li> </ul> | <p><b>T-06 Implement Commute Trip Reduction Program – mandatory</b><br/> <b>T-07 Implement Commute Trip Reduction Marketing – Employment Project</b><br/> <b>T-08 Provide Ride-Sharing Program</b><br/> <b>T-09 Implement Subsidized or Discounted Transit Program – Employment Project</b><br/> <b>T-10 Provide End-of-Trip Bicycle Facilities</b><br/> <b>T-11 Provide Employer-Sponsored Vanpool</b></p> |
| <p><b>T-06 Implement Commute Trip Reduction Program – mandatory</b><br/> The mandatory CTR program must include all other elements (i.e., Measures T-7 through T-11) described for the voluntary program (Measure T-5) plus include mandatory trip reduction requirements (including penalties for non-compliance) and regular monitoring and reporting to ensure the calculated VMT reduction matches the observed VMT reduction.</p>                                                                                                                                                                 | <p><b>T-05 Implement Commute Trip Reduction Program – voluntary</b><br/> <b>T-07 Implement Commute Trip Reduction Marketing – Employment Project</b><br/> <b>T-08 Provide Ride-Sharing Program</b><br/> <b>T-09 Implement Subsidized or Discounted Transit Program – Employment Project</b><br/> <b>T-10 Provide End-of-Trip Bicycle Facilities</b><br/> <b>T-11 Provide Employer-Sponsored Vanpool</b></p> |

|                                                                                     |                                                                                                                                |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>T-07 Implement Commute Trip Reduction Marketing – Employment Project</b>         | <b>T-05 Implement Commute Trip Reduction Program – voluntary<br/>T-06 Implement Commute Trip Reduction Program – mandatory</b> |
| <b>T-08 Provide Ride-Sharing Program – Employment Project</b>                       | <b>T-05 Implement Commute Trip Reduction Program – voluntary<br/>T-06 Implement Commute Trip Reduction Program – mandatory</b> |
| <b>T-09 Implement Subsidized or Discounted Transit Program – Employment Project</b> | <b>T-05 Implement Commute Trip Reduction Program – voluntary<br/>T-06 Implement Commute Trip Reduction Program – mandatory</b> |
| <b>T-10 Provide End-of-Trip Bicycle Facilities</b>                                  | <b>T-05 Implement Commute Trip Reduction Program – voluntary<br/>T-06 Implement Commute Trip Reduction Program – mandatory</b> |
| <b>T-11 Provide Employer-Sponsored Vanpool</b>                                      | <b>T-05 Implement Commute Trip Reduction Program – voluntary<br/>T-06 Implement Commute Trip Reduction Program – mandatory</b> |

## **Attachment C: Detailed VMT Forecasting Information**

---

This section provides detailed VMT forecasting instructions for use with the Southern California Association of Governments (SCAG) Travel Demand Model. Please note that SCAG updates the travel demand model every four years and the latest version available should be utilized for VMT assessment in the City.

The SCAG 2024 RTP Model, released in April 2024, is an Activity-Based Travel Demand Model (ABM), which simulates daily activities of each resident and household in the region and generate travel to link those activities in time and space. Compared to the SCAG 2016 RTP model, a trip-based model used in the last SGVCOG VMT Tool, the 2024 RTP model generates a complete travel profile or trajectory for a typical weekday for each resident, which could be traced to home or work TAZs.

Please note that a trip-based model generates trips by purpose and by TAZ, without any linkage between those trips and to trip-makers, due to its aggregate nature, therefore the VMT metrics used with a trip-based model only covers partial VMT information. This shortcoming has been overcome by an ABM, which the SCAG 2024 RTP Model follows. We could develop new VMT metrics to provide a complete VMT profile using the newly released SCAG model.

Given the SCAG ABM takes socio-economic variables, such as population, household, and employment, as the inputs to estimate travel, this may create challenges for complying with the VMT guidance because trip generation is not directly tied to specific land use categories. The following methodology addresses this particular challenge among others.

Based on the complete travel profiles generated by SCAG ABM, all the tours/trips made by resident can be traced back to their home TAZs, where residential land uses are located; while work-related tours/trips made by workers can be traced to their work location, where non-residential land uses are located. Focusing on residential and employment land uses, the first step to forecasting VMT requires translating the land use into model terms, the closest approximations are:

- Resident VMT: VMT of all tours made by residents, summarized by home TAZ.  
Given the detailed travel profile that the SCAG Model provides, additional VMT metrics can be developed as alternatives to be used in projects based on the discretion of the city, as listed below.
  - Alternative #1: Home-based VMT: VMT of the home-based tours only, made by residents. This VMT metric is a subset of the total resident VMT.
  - Alternative #2: Home-based direct VMT: VMT for home-based trips only. This is equivalent to the home-based VMT in a trip-based model and is a subset of the home-based VMT.
- Employee VMT: VMT for all work-related including work or work-related business tours, made by employed residents and summarized by work location TAZ.

Similarly, additional VMT metrics can be developed as alternatives to be used in projects based on the discretion of cities, as listed below.

- Alternative #1: VMT for work tours (commuting only). This VMT metric is a subset of VMT for all work-related tours.
- Alternative #2: HBW direct VMT: VMT for home-based work trips with both trip-ends being home and work respectively, a subset of the VMT for work tours.

The VMT metrics listed above are calculated based on the simulated trip list, which only includes travel of the residents within the modeling region, instead of using the final trip tables used in the standard vehicle assignment since they are not stratified by tour or trip purpose. In order to provide the most complete VMT estimates including external trips, the recommended approach to estimating VMT is outlined below. Deviating from this approach will require justification and approval from the City Traffic Engineer.

### **VMT Forecasting Instructions**

This approach will calculate total Origin/Destination (OD) VMT using standard SCAG model output files. The OD method for calculating total VMT includes all vehicle trips that start in a specific traffic analysis zone, and all vehicle trips that end in a specific traffic analysis zone. The major steps of this approach are listed as follows:

- Re-skim final loaded congested networks and adjust the external skim for each mode and time period to account for truncated trips
- Multiply appropriate distance skim matrices by OD trip matrices to estimate VMT by time period
- Sum matrices by time period and mode to calculate daily automobile VMT
- Calculate automobile VMT for individual TAZs

### **Appropriateness Checks**

The number of vehicle trips from the total VMT estimation should match as closely as possible with the results from the traditional model process. The estimated results should be checked against the results from a full model run to understand the degree of accuracy. Note that these custom processes may or may not include full lengths of IX/XI trips (trips with origins or destinations outside of the model roadway network) or special generator trips (airport, seaport, stadium, etc.).

When calculating VMT for comparison at the study area, citywide, or regional geography, the same methodology that was used to estimate project specific VMT should be used. The VMT for these comparisons can be easily calculated by aggregating the row or column totals for all zones that are within the desired geography.

## **Attachment D: VMT Reduction Strategies**

---

# Memorandum

Date: January 11, 2024

To: Roy Choi, SGVCOG  
Steph Wong, SGVCOG  
Turner Lott, SGVCOG

From: Jolene Hayes and Katy Cole, Fehr & Peers

Subject: **SGVCOG VMT Evaluation Tool CAPCOA Updates Final Technical Memorandum (Deliverable 2.4.2)**

OC20-0715.02

## Introduction

This draft technical memorandum documents the differences between the 2010 *Quantifying Greenhouse Gas Mitigation Measures* and 2021 *Handbook for Analyzing Greenhouse Gas Emission Reductions, Assessing Climate Vulnerabilities, and Advancing Health and Equity* (Handbook) published by the California Air Pollution Control Officials Association (CAPCOA). The 2021 Handbook updated the 2010 document with new data and research.

Information contained in the Handbook is a critical input to the SGVCOG VMT Evaluation Tool. The SGVCOG VMT Evaluation Tool (Tool) provides participating cities with the ability to screen out projects located within Low VMT areas. In addition, the Tool contains VMT reduction measures that could be applied to reduce the estimated project-generated VMT to a level below the adopted significance threshold. The current version of the Tool was developed in 2020, one year before CAPCOA published the 2021 Handbook. This technical memorandum describes changes to the Handbook and how the changes impact the update to the Tool.

## CAPCOA Changes

The current Tool provides VMT mitigation options based on the 2010 CAPCOA Handbook, research on travel behavior by census tract, and additional documentation.<sup>1</sup> In December 2021, CAPCOA updated this handbook to reflect new data and measures to quantify greenhouse gas (GHG) reductions across categories and subcategories. For the purpose of the Tool, the GHG reduction strategies focus on only the Transportation category and its associated subcategories contained in the Handbook. Changes to the

---

<sup>1</sup> Neighborhood types from Salon, Deborah. February 2014. Quantifying the effect of local government actions on VMT. California Air Resources Board and the California Environmental Protection Agency

transportation subcategories, place type, VMT reduction strategies, and the quantification of VMT reduction strategies are described herein.

## Subcategories

The 2010 CAPCOA Handbook identified four (4) subcategories appropriate for including in the Tool and provided the maximum VMT reduction associated with various strategies within each subcategory. The 2021 CAPCOA Handbook retained the same number of subcategories; however, the number of quantified strategies under each subcategory have been reduced or the strategies have been modified due to refinement of empirical data, analysis, reevaluation of VMT reduction potential, and consideration of the research meeting the rigor required for CEQA analysis.

The four (4) subcategories are:

- Land Use
  - 2010 Handbook: 9 quantified strategies
  - 2021 Handbook: 5 quantified strategies
- Trip Reduction Programs
  - 2010 Handbook: 15 quantified strategies
  - 2021 Handbook: 10 quantified strategies
- Parking or Road Pricing/Management
  - 2010 Handbook: 4 quantified strategies
  - 2021 Handbook: 4 quantified strategies
- Neighborhood Design
  - 2010 Handbook: 9 quantified strategies
  - 2021 Handbook: 9 quantified strategies

The 2021 Handbook also identified a scale of application at the Project/Site versus within the Plan/Community. Only strategies that have a scale of application at the Project/Site are appropriate for individual land development projects, or as stated in the 2010 Handbook, "Project/Site refers to measures that reduce emissions at the scale of a parcel, employer, or development project" (2021 Handbook, Page 37). Strategies that are identified as Plan/Community are "measures that reduce emissions at the scale of a neighborhood, corridor, or entire municipality" (2021 Handbook, Page 37). Since the 2021 Handbook

specifies scale of application, only strategies that are appropriate for Project/Site scale of application are included in the updated Tool. This results in fewer strategies that are applicable than in the current Tool.

The “Neighborhood Place Types” were also altered. Instead of the seven place types, as described in Table 1, the 2021 Handbook aggregated the Locational Context into three place types: 1) Urban, 2) Suburban, and 3) Rural.

**Table 1. CAPCOA Handbook Neighborhood Place Types Comparison**

| 2010 Neighborhood Place Types   | Description                                                                                                                             | 2021 Neighborhood Place Types |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| Central City Urban              | Very high density, excellent accessibility, high public transit access, low single-family homes, older high-value housing stock         | Urban                         |
| Urban High Transit Use          | High density, good accessibility, high public transit access, low single-family homes, middle-aged and older housing stock              |                               |
| Urban Low Transit Use           | Good accessibility, low vacancy, middle-aged housing stock                                                                              |                               |
| Suburb with Multifamily Housing | Average on most indicators, low single-family homes, and relatively lower housing values                                                | Suburban                      |
| Suburb with Single-Family Homes | Low density and accessibility, low vacancy, high newer single-family homes, and relatively higher housing values                        |                               |
| Rural in Urbanized Area         | Slightly better accessibility than the truly “rural” tracts, more likely to have multifamily housing                                    | Rural                         |
| Rural                           | Very low access, high vacancy, high newer single-family homes with lower housing values (mainly outside population centers of any kind) |                               |

Notes: Neighborhood place type coding used in script: 1) Urban Low Transit Use, 2) Suburb with Multifamily Housing, 3) Central City Urban, 4) Rural, 5) Suburb with Single Family Homes, 6) Urban High Transit Use, and 7) Rural in Urbanized Area. Categories 1, 3, and 6 are now sorted into the “Urban” place type, categories 2 and 5 are sorted into the “Suburban” place type, and Categories 4 and 7 are sorted into the “Rural” place type.

### VTM Reduction Strategies

In the 2010 Handbook, VMT reduction strategies applicable for use in the Tool were categorized into four VMT mitigation categories. The 2021 Handbook added an additional category and altered the descriptions of the others. The VMT reduction strategies included in the Tool are supported by evidence from a previous literature review prepared by Fehr & Peers, and from our work in VMT reduction strategies. This documentation also specifies the efficacy of the measure in Urbanized Area and Rural

neighborhood place types.<sup>2</sup> Differences in the mitigation categories (or tiers) applicable to the SGVCOG Tool are provided as follows:

**Table 2: Changes to CAPCOA Categories**

| Tool Category                                  | 2010 CAPCOA Category            | 2021 CAPCOA Categories               |
|------------------------------------------------|---------------------------------|--------------------------------------|
| Tier 1: Project Characteristics                | Land Use/Location               | Land Use                             |
| Tier 2: Multimodal Infrastructure              | Neighborhood/Site Enhancements  | Neighborhood Design                  |
| Tier 3: Parking                                | Parking Policy/Pricing          | Parking or Road Pricing / Management |
| Tier 4: Transportation Demand Management (TDM) | Commute Trip Reduction Programs | Trip Reduction Programs              |

Strategies in each of the 2021 Categories described in Table 2 and their corresponding evidence and calculations will be updated in the Tool. (Shortened versions of these descriptions will be provided in the tooltips (information buttons) within the tool itself.) As part of this effort, we have developed scripts for the purpose of reflecting the 2021 CAPCOA strategies and VMT reduction associated with each one. The following tables provide a summary of changes that informed the development of the scripts. These changes will be incorporated into the Tool as part of Task 2.4.2.

**Table 3: Comparison of CAPCOA 2010 and 2021 VMT Reduction Strategies**

| 2010 Strategy (by Sub-Sector)          | Included in 2021 Handbook? | If in New 2021 Handbook - Scale of Applicability (Project/Site(P/S), Neighborhood/City (N/C), All) | 2021 VMT Reduction Max | 2021 Sub-Sector Maximum                         |
|----------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------|
| <b>Land Use</b>                        |                            |                                                                                                    |                        |                                                 |
| Increase Density LUT-1                 | Modified (see T-1)         | NA                                                                                                 | NA                     | Project/Site: 65%<br>Neighborhood/<br>City: 30% |
| Increase Location Efficiency LUT-2     | Modified (see T-2)         | NA                                                                                                 | NA                     |                                                 |
| Increase Density of Urban and Suburban | Modified (see T-2)         | NA                                                                                                 | NA                     |                                                 |

<sup>2</sup> These neighborhood place types were added for completeness and allows reductions similar to suburban with single family neighborhood place type to provide flexibility in testing VMT reductions in rural settings. Many VMT reduction measures are not as effective in rural settings and the analyst should consider available research and supplement that research with local data on VMT reductions in rural settings when evaluating VMT reductions in a rural setting.

| 2010 Strategy (by Sub-Sector)                      | Included in 2021 Handbook? | If in New 2021 Handbook - Scale of Applicability (Project/Site(P/S), Neighborhood/City (N/C), All) | 2021 VMT Reduction Max | 2021 Sub-Sector Maximum |
|----------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------|------------------------|-------------------------|
| <b>Land Use</b>                                    |                            |                                                                                                    |                        |                         |
| Development (Mixed Use) LUT-3                      |                            |                                                                                                    |                        |                         |
| Increase Destination Accessibility                 | T-29A and T-29B            | T-29A: P/S T-29B: N/C                                                                              | Not Quantified         |                         |
| Increase Transit Accessibility                     | Modified                   | NA                                                                                                 | NA                     |                         |
| Integrate Affordable and Below Market Rate Housing | T-30                       | P/S                                                                                                | Not Quantified         |                         |
| Orient Project Toward Non-Auto Corridor            | T-31                       | P/S                                                                                                | Not Quantified         |                         |
| Locate Project near Bike Path/Bike Lane            | T-32                       | P/S                                                                                                | Not Quantified         |                         |
| Improve Design of Development                      | Modified                   | NA                                                                                                 | NA                     |                         |
| Increase Residential Density                       | T-1                        | P/S                                                                                                | 30%                    |                         |
| Increase Job Density                               | T-2                        | P/S                                                                                                | 30%                    |                         |
| Provide Transit-Oriented Development               | T-3                        | P/S                                                                                                | 31%                    |                         |
| Improve Street Connectivity                        | T-16                       | N/C                                                                                                | 30%                    |                         |

| Measure (by Sub-Sector)                                               | Included in New 2021 Admin Draft? | If in New 2021 Admin Draft - Scale of Applicability (Project/Site(P/S), Neighborhood/City (N/C), All) | 2021 VMT Reduction Max | 2021 Sub-Sector Maximum                      |
|-----------------------------------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------|------------------------|----------------------------------------------|
| <b>Trip Reduction Programs (VMT in this section is "commute" VMT)</b> |                                   |                                                                                                       |                        |                                              |
| Implement Commute Trip Reduction Program Voluntary                    | T-4                               | P/S                                                                                                   | 4%                     | Project/Site: 45%<br>Neighborhood/City: 2.3% |

| Measure (by Sub-Sector)                                                          | Included in New 2021 Admin Draft? | If in New 2021 Admin Draft - Scale of Applicability (Project/Site(P/S), Neighborhood/City (N/C), All) | 2021 VMT Reduction Max | 2021 Sub-Sector Maximum |
|----------------------------------------------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------|------------------------|-------------------------|
| <b>Trip Reduction Programs (VMT in this section is "commute" VMT)</b>            |                                   |                                                                                                       |                        |                         |
| Implement Commute Trip Reduction Program Mandatory Implementation and Monitoring | T-5                               | P/S                                                                                                   | 26%                    |                         |
| Provide Ridesharing Program                                                      | T-7                               | P/S                                                                                                   | 8%                     |                         |
| Implement Subsidized or Discounted Transit Program                               | T-8                               | P/S                                                                                                   | 5.5%                   |                         |
| Provide End-of-Trip Bicycle Facilities                                           | T-9                               | P/S                                                                                                   | 4.4%                   |                         |
| Telecommuting and Alternative Work Schedules                                     | NO                                | NA                                                                                                    | NA                     |                         |
| Implement Commute Trip Reduction Marketing                                       | T-6                               | P/S                                                                                                   | 4%                     |                         |
| Implement Preferential Parking Permit Program (Carpoolers)                       | T-39                              | P/S                                                                                                   | Not Quantified         |                         |
| Implement Car-Sharing Program                                                    | NO                                | NA                                                                                                    | NA                     |                         |
| Implement School Pool Program                                                    | T-40                              | P/S                                                                                                   | Not Quantified         |                         |
| Provide Employer Sponsored Vanpool                                               | T-10                              | P/S                                                                                                   | 20.4%                  |                         |
| Implement Bike Sharing Program                                                   | NO                                | NA                                                                                                    | NA                     |                         |
| Implement School Bus Program                                                     | T-41                              | P/S                                                                                                   | Not Quantified         |                         |
| Price Workplace Parking                                                          | T-11                              | P/S                                                                                                   | 20%                    |                         |
| Implement Employee Parking Cash-Out                                              | T-12                              | P/S                                                                                                   | 12%                    |                         |
| Community-Based Travel Planning                                                  | T-22                              | N/C                                                                                                   | 2.3%                   |                         |
| Provide First and Last Mile TNC Incentives                                       | T-38                              | N/C                                                                                                   | Not Quantified         |                         |

| Measure (by Sub-Sector)                               | Included in New 2021 Admin Draft? | If in New 2021 Admin Draft - Scale of Applicability (Project/Site(P/S), Neighborhood/City (N/C), All) | 2021 VMT Reduction Max | 2021 Sub-Sector Maximum                    |
|-------------------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------|------------------------|--------------------------------------------|
| <b>Parking Management</b>                             |                                   |                                                                                                       |                        |                                            |
| Limit Parking Supply                                  | Modified                          | NA                                                                                                    | NA                     | Project/Site: 30%<br>Neighborhood/City:30% |
| Unbundle Residential Parking Costs from Property Cost | T-15                              | P/S                                                                                                   | 15.7%                  |                                            |
| Implement Market Price Public Parking (On-Street)     | T-23                              | N/C                                                                                                   | 30%                    |                                            |
| Require Residential Area Parking Permits              | NO                                | NA                                                                                                    | NA                     |                                            |
| Limit Residential Parking Supply                      | T-14                              | P/S                                                                                                   | 13.7%                  |                                            |
| Provide Electric Vehicle Charging Infrastructure      | T-13                              | P/S                                                                                                   | 0%                     |                                            |

| Measure (by Sub-Sector)                                 | Included in New 2021 Admin Draft? | If in New 2021 Admin Draft - Scale of Applicability (Project/Site(P/S), Neighborhood/City (N/C), All) | 2021 VMT Reduction Max | 2021 Sub-Sector Maximum                   |
|---------------------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------|------------------------|-------------------------------------------|
| <b>Neighborhood Design</b>                              |                                   |                                                                                                       |                        |                                           |
| Provide Pedestrian Network Improvements                 | T-17                              | N/C                                                                                                   | 6.4%                   | Project/Site: NA<br>Neighborhood/City: 8% |
| Traffic Calming Measures                                | T-34                              | N/C                                                                                                   | Not Quantified         |                                           |
| Implement a Neighborhood Electric Vehicle (NEV) Network | NO                                | NA                                                                                                    | NA                     |                                           |
| Urban Non-Motorized Zones                               | T-35                              | N/C                                                                                                   | Not Quantified         |                                           |
| Incorporate Bike Lane Street Design (on-site)           | NO                                | NA                                                                                                    | NA                     |                                           |

| Measure (by Sub-Sector)                                 | Included in New 2021 Admin Draft? | If in New 2021 Admin Draft - Scale of Applicability (Project/Site(P/S), Neighborhood/City (N/C), All) | 2021 VMT Reduction Max       | 2021 Sub-Sector Maximum |
|---------------------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------|-------------------------|
| <b>Neighborhood Design</b>                              |                                   |                                                                                                       |                              |                         |
| Provide Bike Parking in Non-Residential Projects        | T-33                              | All                                                                                                   | Not Quantified               |                         |
| Provide Bike Parking In Multi-Unit Residential Projects | T-33                              | All                                                                                                   | Not Quantified               |                         |
| Provide EV Parking                                      | NO                                | NA                                                                                                    | NA                           |                         |
| Dedicate Land for Bike Trails                           | NO                                | NA                                                                                                    | NA                           |                         |
| Construct or Improve a Bike Facility                    | T-18-A                            | N/C (corridor)                                                                                        | 0.8% of adjacent roadway VMT |                         |
| Construct or Improve Bike Boulevard                     | T-18-B                            | N/C (corridor)                                                                                        | 0.2% of corridor VMT         |                         |
| Expand Bikeway Network                                  | T-19                              | N/C                                                                                                   | 0.50%                        |                         |
| Implement Conventional Carshare Program                 | T-20-A                            | N/C                                                                                                   | 0.15%                        |                         |
| Implement Electric Carshare Program                     | T-20-B                            | N/C                                                                                                   | 0.15%                        |                         |
| Implement Pedal (non-Electric) Bikeshare Program        | T-21-A                            | N/C                                                                                                   | 0.02%                        |                         |
| Implement Electric Bikeshare Program                    | T-21-B                            | N/C                                                                                                   | 0.06%                        |                         |
| Implement Scootershare Program                          | T-21-C                            | N/C                                                                                                   | 0.07%                        |                         |

| Measure (by Sub-Sector)                         | Included in New 2021 Admin Draft? | If in New 2021 Admin Draft - Scale of Applicability (Project/Site(P/S), Neighborhood/City (N/C), All) | 2021 VMT Reduction Max | 2021 Sub-Sector Maximum                        |
|-------------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------|
| <b>Transit</b>                                  |                                   |                                                                                                       |                        |                                                |
| Provide a Bus Rapid Transit System              | NO                                | NA                                                                                                    | NA                     | Project/Site: NA<br>Neighborhood/<br>City: 15% |
| Implement Transit Access Improvements           | NO                                | NA                                                                                                    | NA                     |                                                |
| Expand Transit Network Coverage or Hours        | T-24                              | N/C                                                                                                   | 4.6%                   |                                                |
| Expand Transit Service Frequency/Speed          | T-25                              | N/C                                                                                                   | 11.3%                  |                                                |
| Provide Bike Parking Near Transit               | T-45                              | N/C                                                                                                   | Not Quantified         |                                                |
| Provide Local Shuttles                          | NO                                | NA                                                                                                    | NA                     |                                                |
| Implement Transit-Supportive Roadway Treatments | T-26                              | N/C                                                                                                   | 0.6%                   |                                                |
| Reduce Transit Fares                            | T-27                              | N/C                                                                                                   | 1.2%                   |                                                |
| Provide Real-Time Transit Information           | T-42                              | N/C                                                                                                   | Not Quantified         |                                                |
| Provide Electric Shuttles                       | T-43                              | P/S                                                                                                   | Not Quantified         |                                                |
| Improve Transit Access, Safety, and Comfort     | T-44                              | N/C                                                                                                   | Not Quantified         |                                                |

The 2021 CAPCOA strategies are presented in **Figure 1** and further defined following the figure. **Figure 1** includes information about the appropriate context and scale for strategy application and potential VMT reduction. Note that the VMT reduction potential is specific to an affected population and may only apply to select types of VMT such as commute trips.

## 2021 CAPCOA VMT Reduction Strategies

The following 27 strategies have sufficient supporting evidence to quantify potential VMT reduction from their implementation.

### T-1: Increase Residential Density

This measure accounts for the VMT reduction achieved by a project that is designed with a higher density of dwelling units (du) compared to the average residential density in the U.S. Increased densities affect the

distance people travel and provide greater options for the mode of travel they choose. Increasing residential density results in shorter and fewer trips by single-occupancy vehicles and thus a reduction in GHG emissions. This measure is best quantified when applied to larger developments and developments where the density is somewhat similar to the surrounding area due to the underlying research being founded in data from the neighborhood level.

### T-2: Increase Job Density

This measure accounts for the VMT reduction achieved by a project that is designed with a higher density of jobs compared to the average job density in the U.S. Increased densities affect the distance people travel and provide greater options for the mode of travel they choose. Increasing job density results in shorter and fewer trips by single-occupancy vehicles and thus a reduction in GHG emissions.

### T-3: Provide Transit-Oriented Development

This measure would reduce project VMT in the study area relative to the same project sited in a non-transit-oriented development (TOD) location. TOD refers to projects built in compact, walkable areas that have easy access to public transit, ideally in a location with a mix of uses, including housing, retail offices, and community facilities. Project site residents, employees, and visitors would have easy access to high-quality public transit, thereby encouraging transit ridership and reducing the number of single occupancy vehicle trips and associated GHG emissions.

### T-4: Integrate Affordable and Below Market Rate Housing

This measure requires below market rate (BMR) housing. BMR housing provides greater opportunity for lower income families to live closer to job centers and achieve a jobs/housing match near transit. It is also an important strategy to address the limited availability of affordable housing that might force residents to live far away from jobs or school, requiring longer commutes. The quantification method for this measure accounts for VMT reductions achieved for multifamily residential projects that are deed restricted or otherwise permanently dedicated as affordable housing.

### T-5: Implement Commute Trip Reduction Program (Voluntary)

This measure will implement a voluntary commute trip reduction (CTR) program with employers. CTR programs discourage single occupancy vehicle trips and encourage alternative modes of transportation such as carpooling, taking transit, walking, and biking, thereby reducing VMT and GHG emissions.

### T-6: Implement Commute Trip Reduction Program (Mandatory Implementation and Monitoring)

This measure will implement a mandatory CTR program with employers. CTR programs discourage single-occupancy vehicle trips and encourage alternative modes of transportation such as carpooling, taking transit, walking, and biking, thereby reducing VMT and GHG emissions.

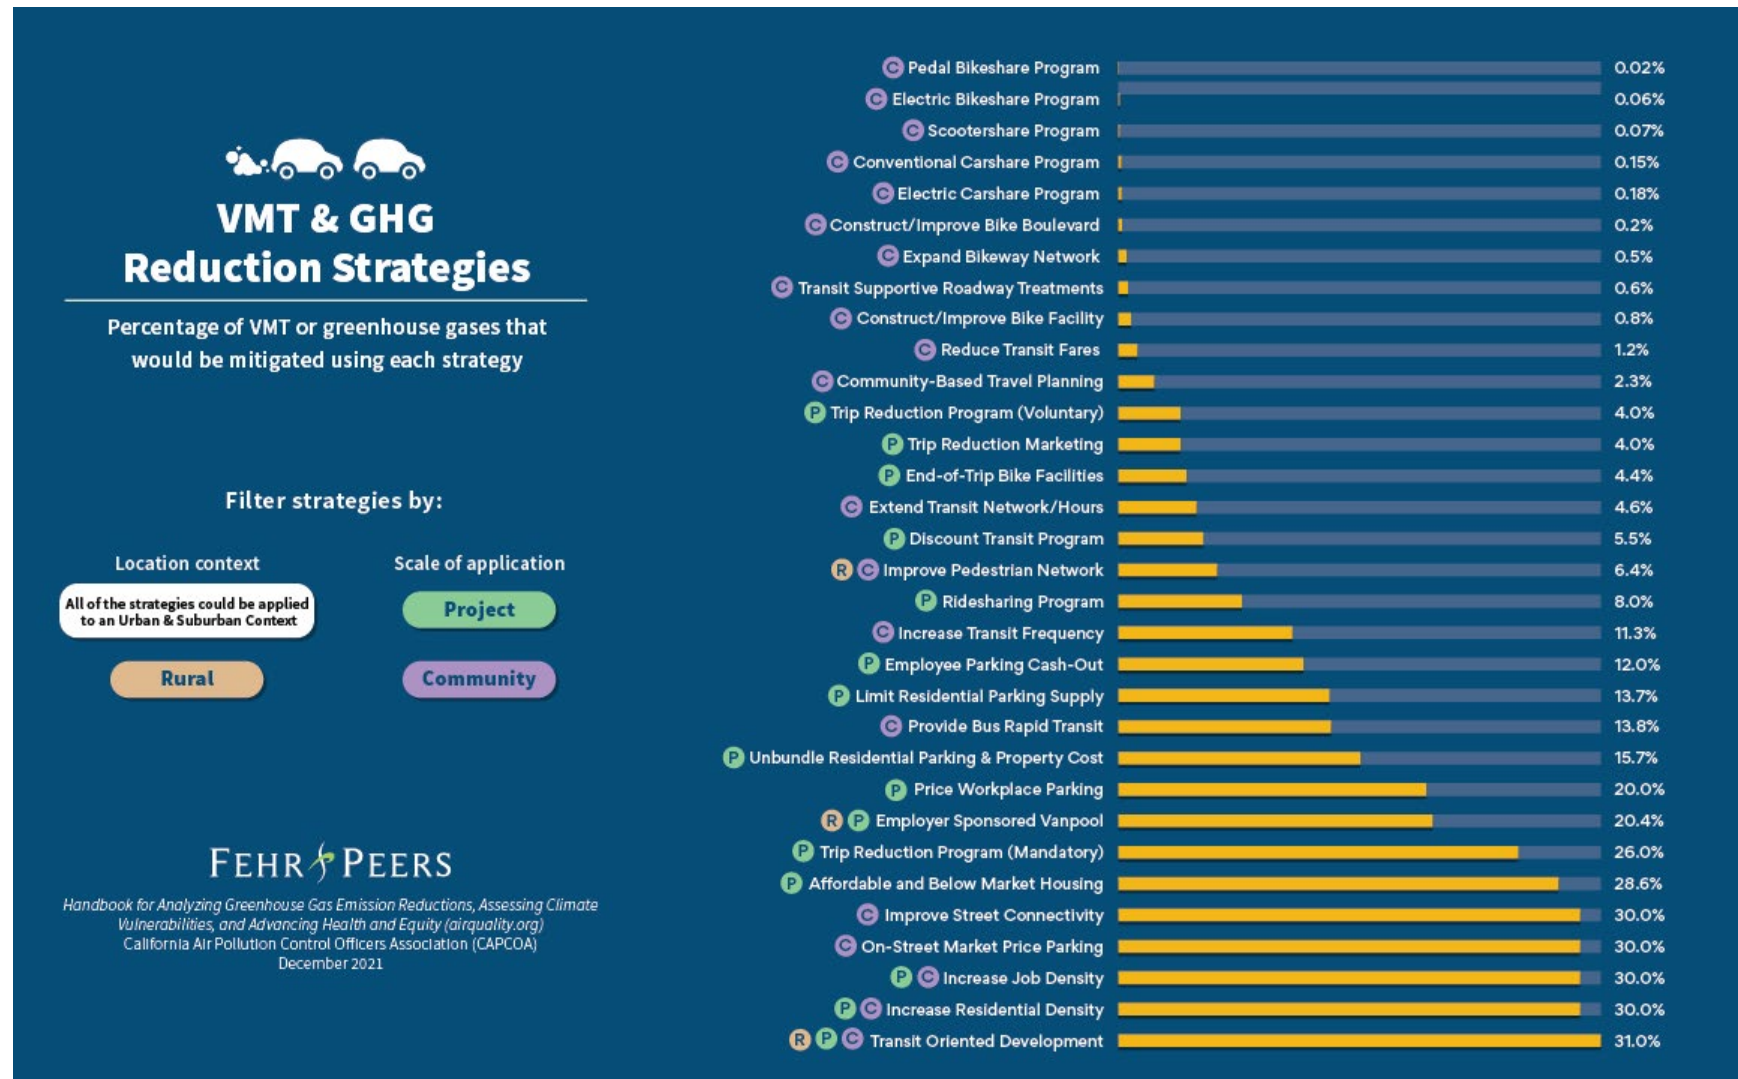


Figure 1 – CAPCOA Handbook VMT Reduction Strategies Summary

### **T-7: Implement Commute Trip Reduction Marketing**

This measure will implement a marketing strategy to promote the project site employer's CTR program. Information sharing and marketing promote and educate employees about their travel choices to the employment location beyond driving such as carpooling, taking transit, walking, and biking, thereby reducing VMT and GHG emissions.

### **T-8: Provide Ridesharing Program**

This measure will implement a ridesharing program and establish a permanent transportation management association with funding requirements for employers. Ridesharing encourages carpooled vehicle trips in place of single-occupied vehicle trips, thereby reducing the number of trips, VMT, and GHG emissions.

### **T-9: Implement Subsidized or Discounted Transit Program**

This measure will provide subsidized or discounted, or free transit passes for employees and/or residents. Reducing the out-of-pocket cost for choosing transit improves the competitiveness of transit against driving, increasing the total number of transit trips and decreasing vehicle trips. This decrease in vehicle trips results in reduced VMT and thus a reduction in GHG emissions.

### **T-10: Provide End-of-Trip Bicycle Facilities**

This measure will install and maintain end-of-trip facilities for employee use. End-of-trip facilities include bike parking, bike lockers, showers, and personal lockers. The provision and maintenance of secure bike parking and related facilities encourages commuting by bicycle, thereby reducing VMT and GHG emissions.

### **T-11: Provide Employer-Sponsored Vanpool**

This measure will implement an employer-sponsored vanpool service. Vanpooling is a flexible form of public transportation that provides groups of 5 to 15 people with a cost-effective and convenient rideshare option for commuting. The mode shift from long-distance, single-occupied vehicles to shared vehicles reduces overall commute VMT, thereby reducing GHG emissions.

### **T-12: Price Workplace Parking**

This measure will price onsite parking at workplaces. Because free employee parking is a common benefit, charging employees to park onsite increases the cost of choosing to drive to work. This is expected to reduce single-occupancy vehicle commute trips, resulting in decreased VMT, thereby reducing associated GHG emissions.

### **T-13: Implement Employee Parking Cash-Out**

This measure will require project employers to offer employee parking cash-out. Cash-out is when employers provide employees with a choice of forgoing their current subsidized/free parking for a cash payment equivalent to or greater than the cost of the parking space. This encourages employees to use other modes of travel instead of single occupancy vehicles. This mode shift results in people driving less and thereby reduces VMT and GHG emissions.

### T-14: Provide Electric Vehicle Charging Infrastructure

Install onsite electric vehicle chargers in an amount beyond what is required by the 2019 California Green Building Standards (CALGreen) at buildings with designated parking areas (e.g., commercial, educational, retail, multifamily). This will enable drivers of PHEVs to drive a larger share of miles in electric mode (eVMT), as opposed to gasoline-powered mode, thereby displacing GHG emissions from gasoline consumption with a lesser amount of indirect emissions from electricity. Most PHEVs owners charge their vehicles at home overnight. When making trips during the day, the vehicle will switch to gasoline mode if/when it reaches its maximum all-electric range.

### T-15: Limit Residential Parking Supply

This measure will reduce the total parking supply available at a residential project or site. Limiting the amount of parking available creates scarcity and adds additional time and inconvenience to trips made by private auto, thus disincentivizing driving as a mode of travel. Reducing the convenience of driving results in a shift to other modes and decreased VMT and thus a reduction in GHG emissions. Evidence of the effects of reduced parking supply is strongest for residential developments.

### T-16: Unbundle Residential Parking Costs from Property Cost

This measure will unbundle, or separate, a residential project's parking costs from property costs, requiring those who wish to purchase parking spaces to do so at an additional cost. On the assumption that parking costs are passed through to the vehicle owners/drivers utilizing the parking spaces, this measure results in decreased vehicle ownership and, therefore, a reduction in VMT and GHG emissions. Unbundling may not be available to all residential developments, depending on funding sources.

### T-17: Improve Street Connectivity

This measure accounts for the VMT reduction achieved by a project that is designed with a higher density of vehicle intersections compared to the average intersection density in the U.S. Increased vehicle intersection density is a proxy for street connectivity improvements, which help to facilitate a greater number of shorter trips and thus a reduction in GHG emissions.

### T-18: Provide Pedestrian Network Improvement

This measure will increase the sidewalk coverage to improve pedestrian access. Providing sidewalks and an enhanced pedestrian network encourages people to walk instead of drive. This mode shift results in a reduction in VMT and GHG emissions.

### T-19-A: Construct or Improve Bike Facility

This measure will construct or improve a single bicycle lane facility (only Class I, II, or IV) that connects to a larger existing bikeway network. Providing bicycle infrastructure helps to improve biking conditions within an area. This encourages a mode shift on the roadway parallel to the bicycle facility from vehicles to bicycles, displacing VMT and thus reducing GHG emissions. When constructing or improving a bicycle facility, a best practice is to consider local or state bike lane width standards. A variation of this measure is provided as T-19-B, Construct or Improve Bike Boulevard.

### **T-19-B: Construct or Improve Bike Boulevard**

Construct or improve a single bicycle boulevard that connects to a larger existing bikeway network. Bicycle boulevards are a designation within Class III Bikeway that create safe, low-stress connections for people biking and walking on streets. This encourages a mode shift from vehicles to bicycles, displacing VMT and thus reducing GHG emissions. A variation of this measure is provided as T-19-A, Construct or Improve Bike Facility, which is for Class I, II, or IV bicycle infrastructure.

### **T-20: Expand Bikeway Network**

This measure will increase the length of a city or community bikeway network. A bicycle network is an interconnected system of bike lanes, bike paths, bike routes, and cycle tracks. Providing bicycle infrastructure with markings and signage on appropriately sized roads with vehicle traffic traveling at safe speeds helps to improve biking conditions (e.g., safety and convenience). In addition, expanded bikeway networks can increase access to and from transit hubs, thereby expanding the “catchment area” of the transit stop or station and increasing ridership. This encourages a mode shift from vehicles to bicycles, displacing VMT and thus reducing GHG emissions. When expanding a bicycle network, a best practice is to consider bike lane width standards from local agencies, state agencies, or the National Association of City Transportation Officials’ Urban Bikeway Design Guide.

### **T-21-A: Implement Conventional Carshare Program**

This measure will increase carshare access in the user’s community by deploying conventional carshare vehicles. Carsharing offers people convenient access to a vehicle for personal or commuting purposes. This helps encourage transportation alternatives and reduces vehicle ownership, thereby avoiding VMT and associated GHG emissions. A variation of this measure, electric carsharing, is described in Measure T-21-B, Implement Electric Carshare Program.

### **T-21-B: Implement Electric Carshare Program**

This measure will increase carshare access in the user’s community by deploying electric carshare vehicles. Carsharing offers people convenient access to a vehicle for personal or commuting purposes. This helps encourage transportation alternatives and reduces vehicle ownership, thereby avoiding VMT and associated GHG emissions. This also encourages a mode shift from internal combustion engine vehicles to electric vehicles, displacing the emissions-intensive fossil fuel energy with less emissions-intensive electricity. Electric carshare vehicles require more staffing support compared to conventional carshare programs for shuttling electric vehicles to and from charging points. A variation of this measure, conventional carsharing, is described in Measure T-21-A, Implement Conventional Carshare Program.

### **T-22-A: Implement Pedal (Non-Electric) Bikeshare Program**

This measure will establish a bikeshare program. Bikeshare programs provide users with on-demand access to bikes for short term rentals. This encourages a mode shift from vehicles to bicycles, displacing VMT and thus reducing GHG emissions. Variations of this measure are described in Measure T-22-B, Implement Electric Bikeshare Program, and Measure T-22-C, Implement Scootershare Program.

### T-22-B: Implement Electric Bikeshare Program

This measure will establish an electric bikeshare program. Electric bikeshare programs provide users with on-demand access to electric pedal assist bikes for short-term rentals. This encourages a mode shift from vehicles to electric bicycles, displacing VMT and reducing GHG emissions. Variations of this measure are described in Measure T-22-A, Implement Pedal (Non-Electric) Bikeshare Program, and Measure T-22-C, Implement Scootershare Program.

### T-22-C: Implement Scootershare Program

This measure will establish a scootershare program. Scootershare programs provide users with on-demand access to electric scooters for short-term rentals. This encourages a mode shift from vehicles to scooters, displacing VMT and thus reducing GHG emissions. Variations of this measure are described in Measure T-22-A, Implement Pedal (Non-Electric) Bikeshare Program, and Measure T-22-B, Implement Electric Bikeshare Program.

### T-23: Provide Community-Based Travel Planning

This measure will target residences in the plan/community with community-based travel planning (CBTP). CBTP is a residential based approach to outreach that provides households with customized information, incentives, and support to encourage the use of transportation alternatives in place of single occupancy vehicles, thereby reducing household VMT and associated GHG emissions.

### T-24: Implement Market Price Public Parking (On-Street)

This measure will price all on-street parking in a given community, with a focus on parking near central business districts, employment centers, and retail centers. Increasing the cost of parking increases the total cost of driving to a location, incentivizing shifts to other modes and thus decreasing total VMT to and from the priced areas. This VMT reduction results in a corresponding reduction in GHG emissions.

### T-25: Extend Transit Network Coverage or Hours

This measure will expand the local transit network by either adding or modifying existing transit service or extending the operation hours to enhance the service near the project site. Starting services earlier in the morning and/or extending services to late-night hours can accommodate the commuting times of alternative-shift workers. This will encourage the use of transit and therefore reduce VMT and associated GHG emissions.

### T-26: Increase Transit Service Frequency

This measure will increase transit frequency on one or more transit lines serving the plan/community. Increased transit frequency reduces waiting and overall travel times, which improves the user experience and increases the attractiveness of transit service. This results in a mode shift from single occupancy vehicles to transit, which reduces VMT and associated GHG emissions.

### T-27: Implement Transit-Supportive Roadway Treatments

This measure will implement transit-supportive treatments on the transit routes serving the plan/community. Transit-supportive treatments incorporate a mix of roadway infrastructure improvements and/or traffic signal modifications to improve transit travel times and reliability. This results in a mode shift from single occupancy vehicles to transit, which reduces VMT and the associated GHG emissions.

### T-28: Provide Bus Rapid Transit

This measure will convert an existing bus route to a bus rapid transit (BRT) system. BRT includes the following additional components, compared to traditional bus service: exclusive right-of-way (e.g., busways, queue jumping lanes) at congested intersections, increased limited-stop service (e.g., express service), intelligent transportation technology (e.g., transit signal priority, automatic vehicle location systems), advanced technology vehicles (e.g., articulated buses, low-floor buses), enhanced station design, efficient fare-payment smart cards or smartphone apps, branding of the system, and use of vehicle guidance systems. BRT can increase the transit mode share in a community due to improved travel times, service frequencies, and the unique components of the BRT system. This mode shift reduces VMT and the associated GHG emissions.

### T-29: Reduce Transit Fares

This measure will reduce transit fares on the transit lines serving the plan/community. A reduction in transit fares creates incentives to shift travel to transit from single-occupancy vehicles and other traveling modes, which reduces VMT and associated GHG emissions. This measure differs from Measure T-8, Implement Subsidized or Discounted Transit Program, which can be offered through employer-based benefits programs in which the employer fully or partially pays the employee's cost of transit.

## VMT Mitigation Measure Effectiveness and Feasibility

The determination of VMT mitigation effectiveness and feasibility is largely determined based on the CAPCOA Handbook evidence. The maximum VMT reduction associated with each mitigation project was then determined from the CAPCOA Handbook or alternative data source with a similar level of supporting evidence. Before actual quantification of any reduction in the project's induced VMT can be performed, additional information, data, and modeling is required as outlined below.

## VMT Mitigation Measure Quantification

The reductions presented in the CAPCOA Handbook are all expressed as percentages – this allows for a high level of flexibility in analyzing VMT on an average daily, or on an annual basis. However, each measure may apply to only a subset of VMT (such as commute or home-based work VMT) – so it is imperative to understand what sort of VMT inputs are needed when mitigating induced automobile VMT. A VMT lexicon shown in **Figure 2** provides additional insights about various VMT types.

Most of the strategies in **Table 3** focus on reducing VMT within physical areas such as communities. The mitigation actions do not involve directly modifying the project alternatives. In these instances, the specific community area must be defined and the types of trips that will be influenced must also be determined. It is also possible that mitigation could include a specific land use project that would be subject to new VMT reduction strategies. In either case, the analysis needs to account for the fact that the strategy will be reducing the VMT being generated by the project site or community area. The VMT reduction associated with that strategy then needs to be applied against the project's VMT to determine the amount of VMT reduction that has been achieved.

| Metric                                 | Definition                                                                                                                                                                                                                                                                                                                                           | Example                                                                               |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Total VMT                              | All vehicle-trips (i.e., passenger and commercial vehicles) assigned on the network within a specific geographic boundary (i.e., model-wide, region-wide, city-wide). Vehicle volume on each link is multiplied by link distance. For use in VMT mitigation analysis, commercial vehicle trips/VMT should be excluded.                               |    |
| Total VMT generated by a project       | All vehicle-trips generated by the site/zone are traced to the zone or zones of study. May use final assignment origin-destination (OD) trip tables or production (P) and attraction (A) estimates multiplied by distance skims. When the model has multiple assignment periods, OD trip tables and congested skims from each period should be used. |    |
| Household VMT per resident             | All automobile (i.e., passenger cars and light-duty trucks) vehicle-trips are traced back to the residence of the trip-maker, even non-home-based trips.                                                                                                                                                                                             |   |
| Home-Based VMT per resident            | All home-based automobile vehicle trips are traced back to the residence of the trip-maker; non-home-based trips are excluded.                                                                                                                                                                                                                       |  |
| Home-Based Work (HBW) VMT per employee | All automobile trips between home and work are counted.                                                                                                                                                                                                                                                                                              |  |